


Manual Instruction




A : Turn off the switch.


B

① Drill $\varnothing 8\text{mm}$ holes according to below drawing.

Model	Power	Fixing Hole Centre
LHB2	130W	760mm




② Insert $\varnothing 8\text{mm}$ expansion pipe in the wall, fix the mounting bracket by M5 screw.





C

- ① Firstly open the clips like picture A
- ② Secondly take off the diffuser like picture B
- ③ As picture C : 1.Open the clips
2.Raise the radiator



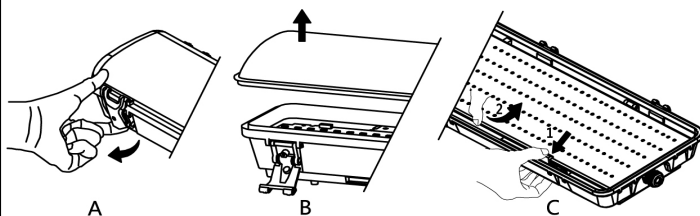


D


- ① Loosen the nut of the cable gland, put the cable through the cable gland.



- ② Connect the cable on the terminal block as below shown and tighten the cable gland




Option 1



Option 2


E

- ① Tighten cable gland as below shown.
- ② Fix gear tray with the housing.
- ③ Close the diffuser.




F


- ① Fix the lamp on the wall.

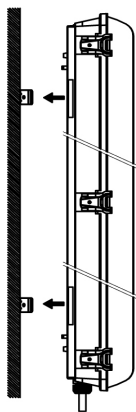

2)Wall mounted

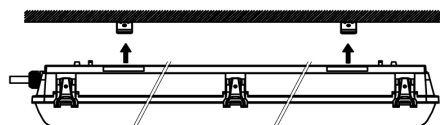

1)Ceiling mounted

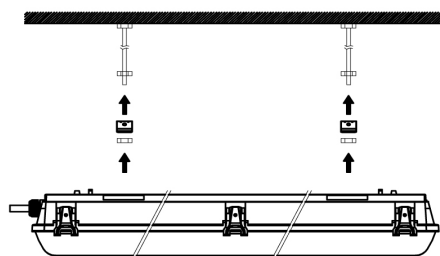

3) supply chain suspension

- 1)"SUITABLE FOR WET LOCATIONS" in form S24L2.
- 2) if wall mounted "SUITABLE FOR MOUNTING WITHIN 1.2(4 ft) OF THE GROUND" in form S24L2.

