

Project:	Date
Type:	
Model:	

DESCRIPTION


The Luminoso LZR Series is the perfect choice for both new construction projects and retrofitting existing canopies. With the LZR, users can achieve over 70% energy savings without compromising essential light levels. Available in 40W or 60W options, it offers lumen packages ranging from 4,690 to 7,108, with an average efficacy of 118 lumens per watt. Additionally, it is available in color temperatures of 4000K and 5000K.



FEATURES

- Efficacy: 117 / 118 Lm/W
- Delivered Light Output: 4,690 / 7,108
- Watts: 40W / 60W
- CRI: Ra>80
- CCT: 4000K, 5000K
- Input Voltage: 120-277VAC
- Power Factor: 0.9
- IP Rating: IP65
- 10KV surge protector inside of power supply
- Standard Lifetime: Designed to L70 minimum 50,000 hours
- Certifications: ETL
- Operating Temperature: -4°F ~ 104°F
- Dimming: 0-10V
- Materials: Cast Aluminum
- Lens: PC (polycarbonate)
- LZR Series LED Canopy Light
- Enter configuration:
- Measurements: W 14.1 x H 6.3 (7.3 w/sensor)

DIMENSIONS

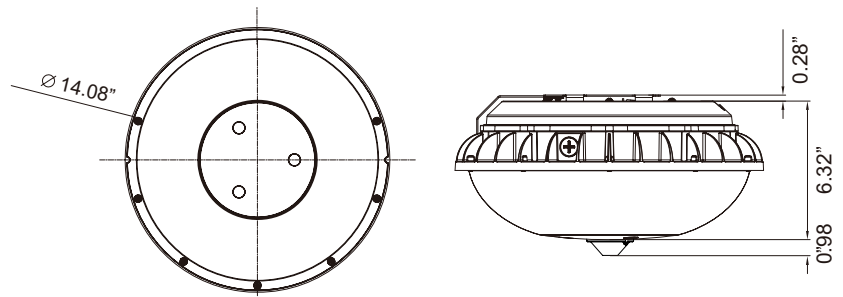

ORDER INFORMATION

EXAMPLE: LZR-60W-Y-40K-5M-DM-SV-MS



Series	Wattage	Voltage	CCT	Beam	Mount	Finish	Option
LZR Garage / Canopy light	40W 40 Watts	Y 120-277V	40K 4000K	5M Type V	DM Direct Mount	SV Silver (Light Grey)	Leave Blank Standard
	60W 60 Watts		50K 5000K			WH** White	MS Motion Sensor Doppler Daylight Harvesting Sensor

Enter configuration:

** Special Order 6-8 weeks, contact vendor.

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

LZR Series


LED Garage / Canopy Light (Dimensions / Performance)



PERFORMANCE DATA

Series	LZR 40W	LZR 60W
Wattage	40	60
CCT	4000K / 5000K	4000K / 5000K
Lumens	4,690	7,108
Efficacy (LPW)	117	118
CRI	80	
Input Voltage	120-277VAC 50/60Hz	
Certifications	UL Listed, FCC, RoHS	
Operating Temp.	-5°F to 120°F	
PF / THD	>0.9, <20%	
Dimming	0-10V (5%-100%)	
Net / Gross weight	10.5 lbs / 13 lbs	

DIMENSIONS

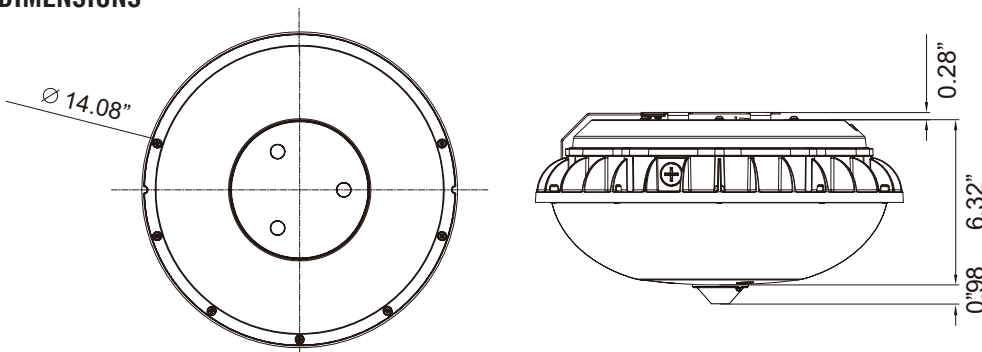

CONSTRUCTION / MOUNTING OPTIONS

- Heavy-duty cast aluminum housing; rust and corrosion resistant; polyester powder coating
- Diffuser: High light transmittance & Polycarbonate with UV
- LEDs: Top grade LED, high-output, long-life;
- Heat Sink: Aluminum sink attached to the housing directly to reduce LED heats and add to life
- LED Driver: IP65/ Constant current
- Finish: Silver finish. Environmentally friendly polyester powder coatings.

