



DLH 2TD N 23 Y ICA 2" LED 120-277V

New Construction Housing
IC-Rated

Listing

- UL Listed for Damp Locations
- UL Listed for Feed Through
- Certified under ASTM-E283 for Air Tight Construction
- Built in Driver 120-277V



Descriptions

The Luminoso 2" LED IC-Rated housing, is perfect for low to medium height ceilings in residential, and commercial applications. It is also suitable for low to medium density blown in insulation. The air tight construction reduces energy costs by preventing air flow between occupied conditioned spaces and unvented areas.

Driver

120-277V built in electronic Direct Current U.L. Listed driver mounted away from LED Array for cool operation and end-of-life modularity. The Luminoso 2" housing and trim combination are standard with 0-10V dimming.


Housing

Integral thermal protector to guard against improper lamping and installation. Trim is secured with internal ClickLok™ locking mechanism. Galvanized steel construction. 4 gauge pre-wired aluminum Junction Box. 4 cubic-inch for a maximum of (4) #12 AWG wires.


Bar Hanger

Pre-installed Real-Nails® easily installs in regular lumber and engineered lumber. Bar Hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.


Dimensions

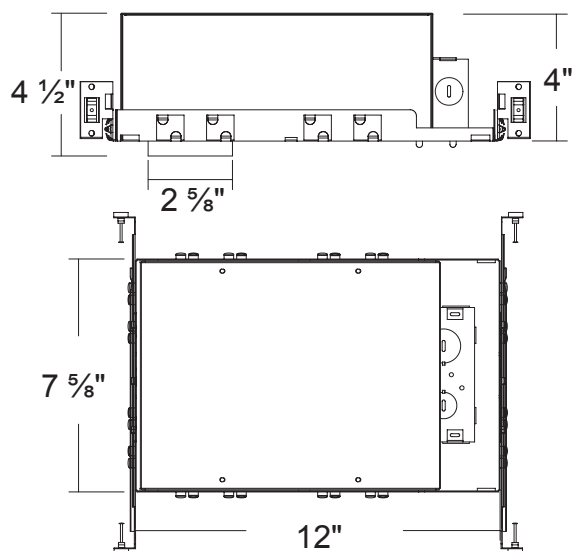


Compatible Trims




DL 2HD RS




DL 2HD RB




DL 2HD RG



DL 2HD SS



DL 2HD SB



DL 2HD SG



Recessed Downlight

WARNING : These products may represent a possible shock or fire hazard if improperly installed or attached in any way. Products should be installed in accordance with these instructions, current electrical codes and/or the current National Electric code (NEC).

CAUTION – To reduce risk of fire, electric shock or injury to persons:

1. Make sure that the electrical power to the fixture is disconnected prior to any installation or retrofit.
2. This light is suitable for damp locations.

WARNING : Risk of fire or electric shock. Installation requires knowledge of recessed lighting luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

Do not use these products in luminaires located where elevated ambient temperatures exist.

WARNING : Risk of fire or electric shock. The installer must determine whether power supply is 120V AC before installation. (120V/277V Ac 50~60Hz is available if 120V/277V is indicated on caution label)

WARNING : Risk of fire or electric shock. Luminaire's wiring, ballast(s), or other electrical parts may be damaged when drilling for installation of reflector kit hardware. If drilling is required in any installation, check for enclosed wiring and components and be careful to protect them from any harm. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.