

Project:	
Types:	
Model#	

## FWP LED Wall Pack

### PRODUCT DESCRIPTION



The FWP wall pack has a built in UL class driver and is also rated for damp and wet locations. Ideal for entry ways, area perimeters, stairwells and hallways. This sealed die-cast wall pack uses less than a third of the electricity of a traditional wall pack and has a life expectancy of more than 10 years. It is perfect for security lighting, stairways, perimeter areas, walkways, parking areas, and warehouse bays.

### PERFORMANCE SUMMARY

Efficacy: 118 / 119 Lm/W
Delivered Light Output: 5,310 / 8,347 Lumens
LED Power: 45 / 70 Watts
CRI: Ra>80
CCT: 4000K / 5000K
Input Voltage: 120 - 277 VAC
Power Factor: > 0.9 (120V)
Rating: IP65
Standard Warranty: 5 Years
Non-dimmable
Standard Lifetime: Designed to L70 minimum 50,000 hours
Working Temperature: -22°F ~ 113°F
Qualifications: UL Listed



### Dimensions

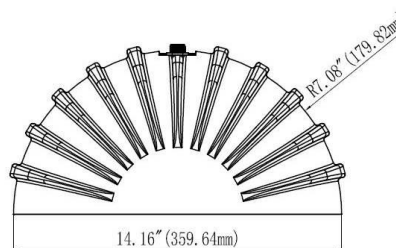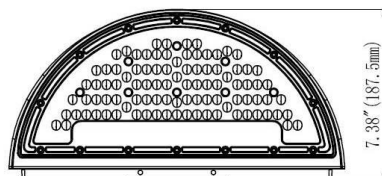

### ORDER INFORMATION

EXAMPLE: FWP-70W-Y-50K-3M-14-WH



Series	Wattage	Voltage	CCT	Beam	Mount	Finish
FWP	45W 70W	Y = 120-277V	50K = 5000K	3M	14 = Direct Mount	WH = White BZ = Bronze

Enter configuration:

\*\* Special Order / contact vendor

Series / Performance

Series No.	FWP-45W	FWP-70W
Power	45W	70W
Lumens	5,310	8,347
Efficacy	118 Lm/W	119 Lm/W
Dimensions (L x W x H)	7.4 x 14.5 x 7.38 in	7.4 x 14.5 x 7.38 in
Input	120-277V	120-277V

Photometric Data

