

Project:	
Type:	
Model#	

## LCF Series LED Flush Mount Light

Exterior Ceiling or Wall

### Features


- The cast aluminum housing and UV-stabilized diffuser are ideal for outdoor use.
- Stainless steel vandal proof screws.
- Vandal proof , IK10, IP65.
- Multi-function, classic design, easy adapted for many application.
- High quality controllers by HYTRONIK.
- 5 years guarantee.

### Specification


Input Voltage	120-277VA		
Power rating	28 Watts		
Lumens	30K	40K	50K
	2,260	2,380	2,500
CRI	>80		
Finish	White/Bronze/Black		
Impact resistance	IK10		
IP rating	IP65		
Power Factor	≥0.9		
Operating Temp	-4°F ~ 122°F		
Certificate	ETL		
Standard	EN60598-2-1		
Emergency	EN60598-2-22		



### Photometric Data:

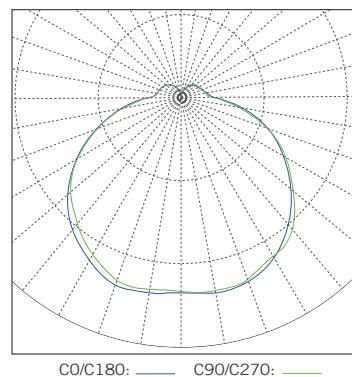

### Dimensions

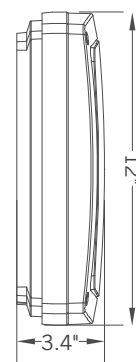

### ORDER INFORMATION

EXAMPLE: LCF-28W-Y-50K-W-14-BK-00



Series	Wattage	Voltage	CCT	Beam	Mount	Finish	Controls
LCF	28W	Y= 120-277V	30K = 3000K 40K = 4000K 50K = 5000K	W = 160°	14 = Direct Mount	BK = Black WH = White BZ = Bronze	Blank = Standard DIM = 0-10V Dimming OO = On/Off Motion Sensor BTD = Bi/Tri Level Dimming Sensor

Enter configuration:

\*\* Special Order / contact vendor