

| | | |
|----------|--|------|
| Project: | | Date |
| Type: | | |
| Model# | | |


LSB-A Series SOLAR LED Bollard

PRODUCT DESCRIPTION

- High brightness LED 18 chips, 0.09W each, 1.8W LED Power.
- 4.5Ah 6.4V LITHIUM LIFEPO4 battery, with fast charging, working temperature 5°F to 149°F.
- 4.5 Watt Monocrystalline Solar Panel. Grade A Solar Cells.
- Height 36 x Width 6.5 in / 21 Lbs.
- INTERPON AKZONOBEL coating.
- 5 Years Warranty.

PERFORMANCE SUMMARY

| |
|---|
| Delivered Light Output: 250 Lumens |
| Watts: 1.8 Watts |
| CCT: 3000K, 4000K, 5000K |
| Standard Lifetime: Designed to L70 minimum 50,000 hours |
| IP Rating: IP65 |
| Charging: 6 Hours / Day, direct sun light |
| Atonomy: 23 Hours |

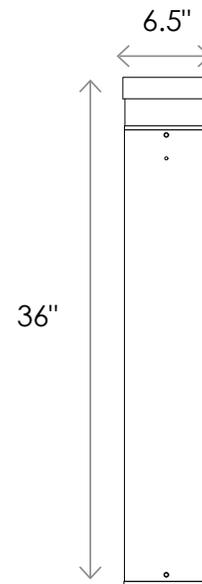

Brightness: 1.8W = 10W = 30W

ORDER INFORMATION

EXAMPLE: LSB-A-1.8W-SP-40K-5M-29-BK



| Series | Size | Watts | Voltage | CCT | Optics | Mount | Finish |
|--------|------|-------|----------------|---|--------|-------------------|------------|
| LSB | A | 1.8W | SP=Solar Power | 30K = 3000K 40K = 4000K 50K = 5000K | 5M | 29 = Anchor Bolts | BK = Black |

Enter configuration: _____

** Special Order / contact vendor

