


Product Features

- Replaces halogen and saves 80% energy
- High quality COB LED chips, provides uniformity
- CRI: 80 / Beam Angle: 100°
- L70 life 50,000 hours
- Available in 3000K, 4000K, 5000K CCT
- Operating Voltage: 120VAC
- Operating Temperature: -4°F to 105°F
- Die cast Aluminum
- ETL listed / Wet locations / IP65
- 5 Year limited warranty
- Pivoting arm allows directional lighting
- Sensor detection distance can be adjusted up to 70ft, timer is adjustable
- Integrated dusk to dawn photocell included



Dimensions

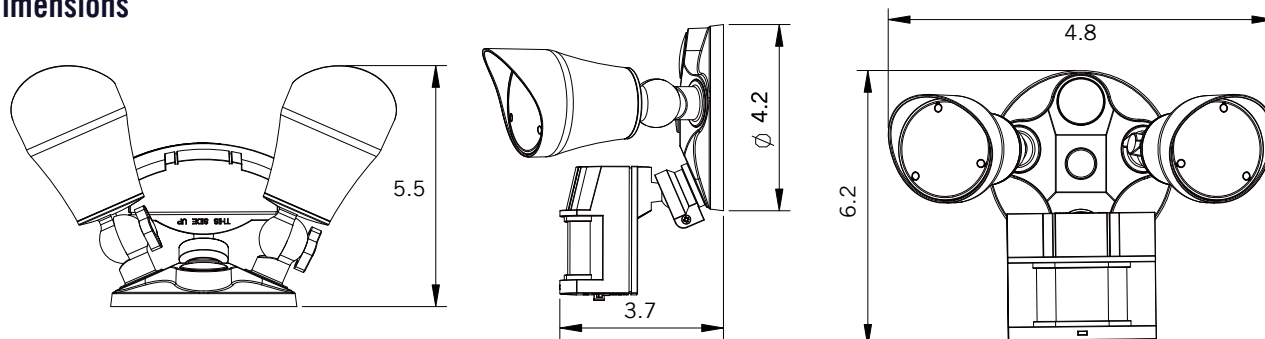

ORDER INFORMATION

EXAMPLE: LSM-2H-20W-Y-40K-WH-MS



Performance Summary

Model	Watts	CCT	Lumen (Lm)	Beam (angle°)	CRI	Voltage	Frequency
LSM	20W (2LT 10Watts)	3000K	1,690	100°	>80	120VAC	50/60Hz
		4000K	1,800				
		5000K	1,870				

120-277V available without motion sensor, contact factory.

Installation diagram

