

## MWR-MWS LED Bollards

### PRODUCT DESCRIPTION

The Moon Walk Series features a heavy-cast aluminum housing designed with modern aesthetics in mind. The architectural luminaire provides brilliant illumination to walkways and other outdoor spaces, improving the visibility, safety, and overall look of any outdoor area. Powered by energy-saving LED technology, this high-powered outdoor luminaire is Dark Sky compliant and paired with state-of-the-art optics to restrict light trespass, glare and light pollution for neighborhood-friendly outdoor lighting.

### PRODUCT SPECIFICATIONS

Efficacy: 90 LPW
Delivered Light Output: 1,800 - 2,700 Lumens
Watts: 20W, 30W
CRI: Ra>70
CCT: 3000K, 4000K, 5000K
Input Voltage: 120-277VAC
Power Factor: 0.95
Operating Temperature: -31°F ~ 113°F
Dimming: Non Dimmable
Standard Warranty: 5 Years
Standard Lifetime: Designed to L70 minimum 50,000 hours
IP Rating: IP65
Materials: Steel base / powder coating



S = Square



R = Round

### ORDER INFORMATION

EXAMPLE: MWR-36-30W-Y-40K-T5-29-BK



Series	Size	Watts	Voltage	CCT	Optics	Mount	Finish
MWR=Round	18in	20W	Y=120-277V	30K = 3000K	3M	29=Anchor Bolts	SL = Silver
MWS=Square	24in	30W	HV=480V**	40K = 4000K	5M		BZ = Bronze
	36in			50K = 5000K			BK = Black
	42in						WH = White


Enter configuration:

\*\* Special Order / contact vendor

## Series / Performance

Series No.	MWR/MWS-20W	MWR/MWS-30W
Power	20W	30W
Lumens:	1,800	2,700
Efficacy	90 LPW	90 LPW
Input current 120/277V	0.16 / 0.07 Amps	0.25 / 0.10 Amps
Input	120-277V AC	120-277V AC

## Dimensions

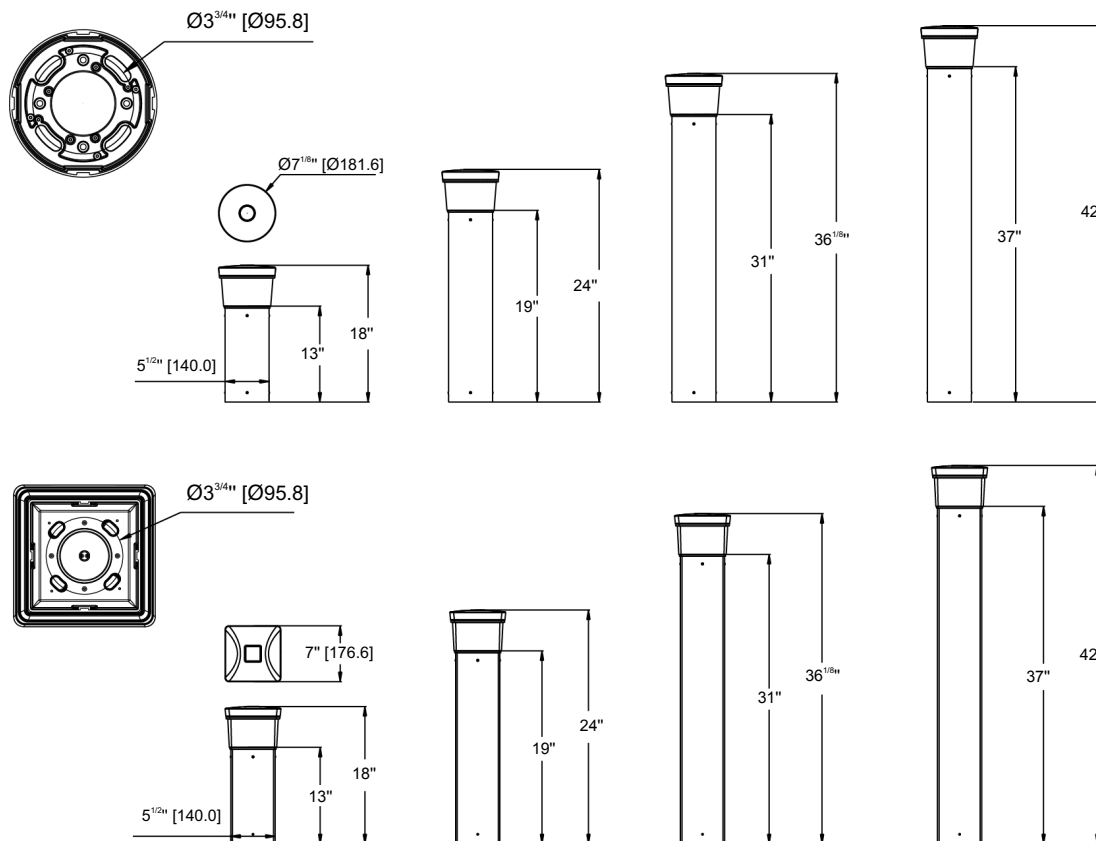

## Photometric Data

