

Project: _____


Type: _____

Model: _____

Specifications:

- Die cast aluminum housing.
- Anodized Polypropylene plastic reflector and optics distribution lens.
- Surface anti-ageing electrostatic spray processing, resistance to corrosion.
- Available finishes, Black, White, and Silver
- Lumens 1,850
- Offered Standard in 3000K, 4000K, and 5000K
- IK08 rated.

Photometric:

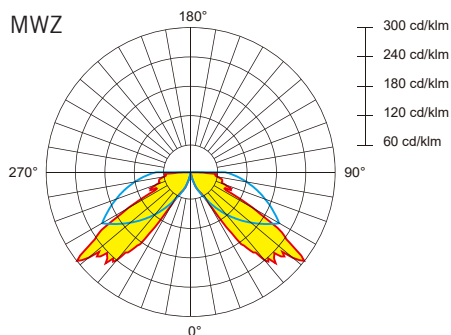

MWZ

Example: MWZ-31-25W-Y-40K-T5-29-BK



Series	Height	Wattage	Voltage	CCT	Beam Type	Mount	Finish
MWZ Bollard	31 31.5 inch height	25W 25 Watts	Y Y = 120-277V	30K 3000K	T5 T5M	29 Anchor Bolt	BK Black
	39 39.4 inch height			40K 4000K			WH White
				50K 5000K			SV Silver

Enter configuration: _____


** Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	MWZ
Power	25W
Lumens	1,850
IP Rating	IP65
Operating Temp.	-4°F to 113°F
Input	120-277V

360° DISTRIBUTION

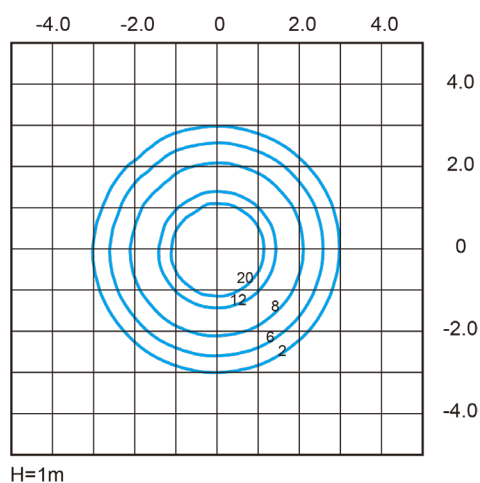

DIMENSIONS

