

Project:

Type:

Model:

Features:

HOUSING MATERIALS	Coated aluminum, anodized powder coating. T=60-80 um. Adhesion of ISO class, 1.ASTM class 4B
GLASS LENS	Tempered step glass. T=4mm
DIMMABLE	Not dimmable
CABLE GLAND	Nickel coated copper
GASKET	Tooling shaped seal
PCB	Excellent heat conductivity aluminum.
OPERATING TEMPERATURE	-4°F to 113°F
POWER CABLE	H05RN-F 2X1.0mm ² L=2.0m (low voltage)
FIXTURE IP/ IK Rating	IP66 Rated / IK07

OPTICS



RGJ



15°



25°



40°



60°



RGJ

FINISH OPTIONS


Graphite
RAL7037

Silver
RAL9006

Bronze
RAL8019

Black
RAL9005

White
RAL9003

Example: RGJ-12L50K-D45-X-GR



Series	Lumens (CCT)			Beam Angle				Voltage	Finish
RGJ 11.5 Watts	10L30K 10L (3000K) 1,080 Lumens	11L40K 11L (4000K) 1,154 Lumens	12L50K 12L (5000K) 1,200 Lumens	D15 15°	D25 25°	D40 40°	D60 60°	X X = 24 Volts Requires remote 24V transformer.	BK Black WH White GR Graphite SV Silver BZ Bronze

Enter configuration:


** Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RGJ
Power	11.5W
Lumens	1,080 (30K) 1,154 (40K) 1,200 (50K)
IP Rating	IP66
Operating Temp.	-4°F to 104°F
Input	24V

DIMENSIONS

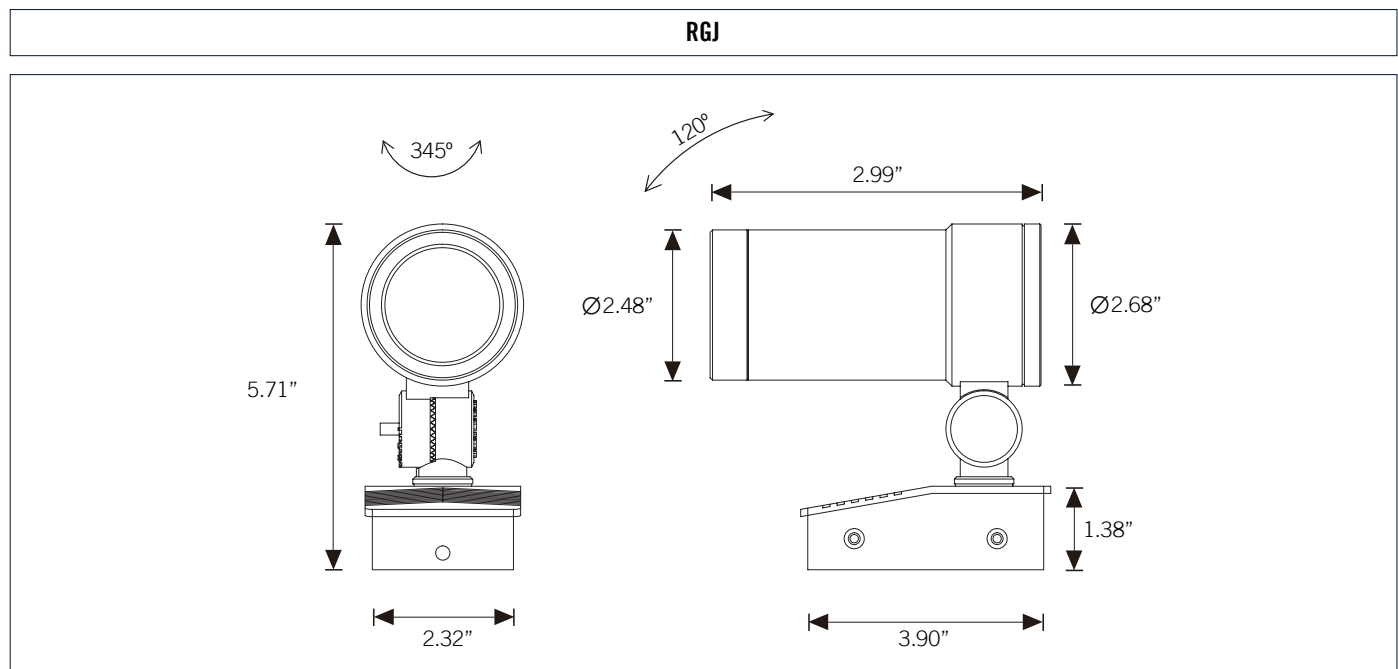

PHOTOMETRIC CURVES

