

PRODUCT DESCRIPTION

Luminoso 4 inch Rotatable LED Residential Downlight provides advanced dimming parameters with capabilities reaching to as low as 5% and works with most widely available traditional dimmers. It is designed to easily install into existing IC or non-IC Six-inch and some Five-inch housings. The RDL is produced with an adjustable gimbal which allows for angling up to 30°. This allows the product to be ideal for situations where a directional light source is needed.

PERFORMANCE SUMMARY

Efficacy: 70LPW
Delivered Light Output: 700 Lumens
Rated Power: 10Watts
CRI:Ra>80
ES CCT Options:2700K & 4000K
Input Voltage: 120 VAC
Input current:0.1A
THD:<17.44%
PF:>0.9596
Standard Warranty: 5 Years
Standard Lifetime: Designed minimum 35,000 hours
Mounting: Recessed

CERTIFICATE

UL listed
Energy Star Listed
T24 Listed
Suitable for damp locations.




4 INCH




Accessories



Dimension

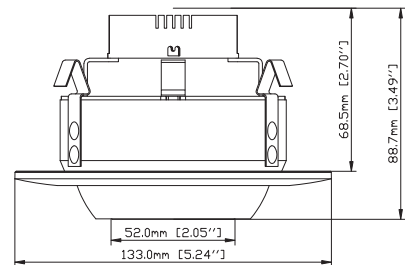

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

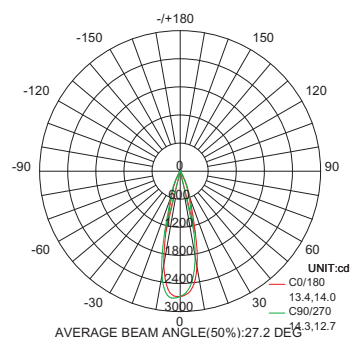

Order Information

RDL4-04-10W-27K-S-Z

Category	Base	Wattage	CCT(X)	Beam Angle	Voltage
RDL4	04 = E26	10W	27K=2700K 40K=4000K	S = 38	Z = 120V