

Post Top SWY

LED Post Top

Project: _____
 Type: _____
 Model: _____

Features:

- Body:** Die-casting aluminum.
- Optical system:** Anodized PP plastic reflector and special light distribution lens, or lenticular tempered glass cover.
- Output Power:** 60W / 80W
- CCT:** 3000K / 4000K / 5000K
- Input Power:** 120VAC / 120-277VAC
- IP Rating:** IP66
- Impact resistance:** IK09






Performance:

Series	Wattage	Lumens	CCT	Efficacy	LED Pcs.	Frequency	N.W. (Lb)	G.W. (Lb)
SWY	60W	6,000	3000K	100	12	50/60Hz	29.7	33.1
			4000K					
	80W	7,045	5000K	90	12			







Example: SWY-16-80W-30K-5M-Y-SV



Series	Mount	Wattage	CCT	Optics	Voltage	Finish
SWY LED Post Top	16 16 = Slip fitter	60W 60 Watts	30K 3000K	2M Type 2	Y Y=120-277 Volts	BK Black  Black RAL9005
		80W 80 Watts	40K 4000K	3M Type 3		WH White  White RAL9010
			50K 5000K	4M Type 4		SV Silver  Silver RAL9007
			5M Type 5			

Enter configuration: _____

** Special Order

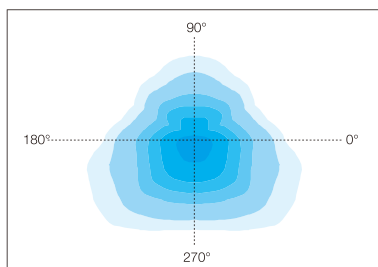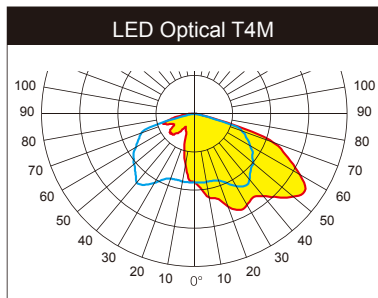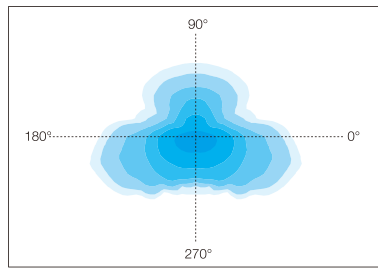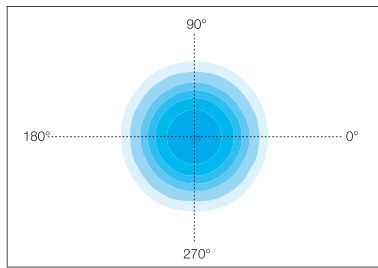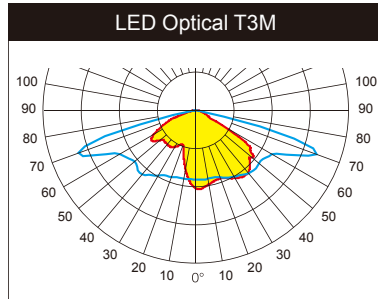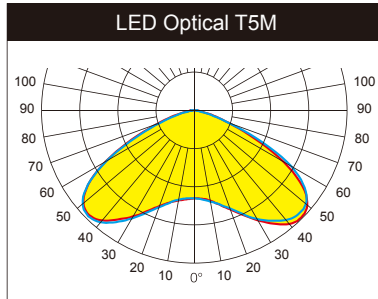

LED Pcs. 12

