

Project:	Date
Type:	
Model:	

### DESCRIPTION

Experience versatility with our 6-inch LED round trims featuring a selectable color temperature switch, providing seamless adaptation to diverse applications. The retrofit design, complemented by a smooth reflector, ensures effortless installation, making it compatible with both our LED dedicated housings and most standard 6-inch housings. These trims are designed for Wet locations, guaranteeing durability and optimal functionality in a variety of environments. Illuminate your space with confidence and style.

### PRODUCT SPECIFICATIONS

- White painted spun aluminum.
- Oversized trim ring constructed from one-piece stamped aluminum body
- Torsion spring mounting style are designed to accommodate most 5" and 6" standard and shallow housings.
- E26 medium screw-base Edison adaptor provides easy installation into Incandescent housings.
- (GU10 and GU24 socket adaptor available - sold separately)

### LED LIGHT ENGINE

- Dimming down to 10% with CL / TRIAC dimmer (operating at 120V)
- CCT SELECTABLE: 2700K, 3000K, 3500K, 4000K, and 5000K
- CRI 90
- Long life LED chips guaranteed up to 50,000hours.

### LISTINGS

- UL Listed
- Wet location rated
- Tested in accordance with IESNA LM79 & LM80

### ORDER INFORMATION

EXAMPLE: DL-6-RSE-23-13-CCTS-Z-W




Series	Reflector	Mount	Wattage	CCT Selectable	Voltage	Finish
<b>DL 6</b> 6 inch Trim	<b>RSE</b> Round Smooth Reflector	<b>23</b> Quick Connect	<b>13</b> 13 Watts	<b>CCTS</b> Selectable Color Temperature (2700K / 3000K / 3500K / 4000K / 5000K)	<b>Z</b> Z = 120V  <b>Y</b> Y = 120-277V* (Dimmable at 120V)	<b>W</b> White


Enter configuration: \_\_\_\_\_

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

## DL-6-RSE-CCTS 6 INCH ROUND TRIM SMOOTH / CCT SELECTABLE

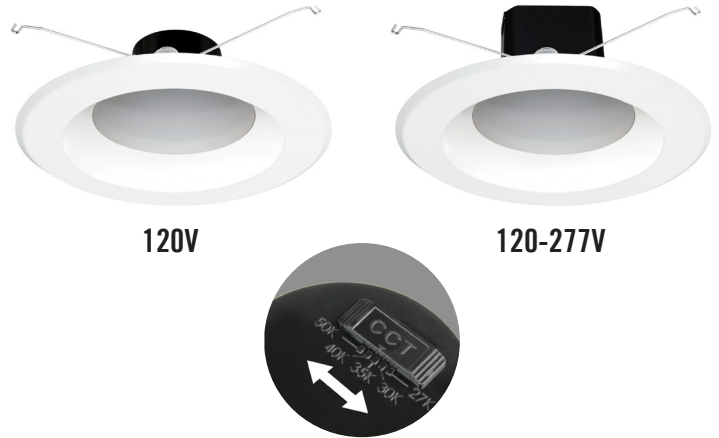

### DIMENSIONS

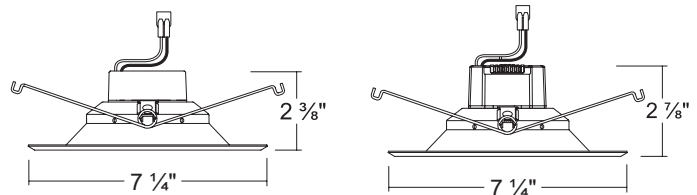

**PERFORMANCE DATA**

Watts	Voltage	CRI	Lumens				
13	120V / 120-277V	90	830	850	880	900	910
			27K	30K	35K	40K	50K

**COLOR TEMPERATURE SELECTABLE**



**TRIAC Dimmer Compatibility (120V)**

List of Triac Dimmer Switch		
Mfr	Model #	Dimming Rate
Leviton	1A1505 / 1C1605	10 - 100%
Leviton	6631 / 6633	10 - 100%
Lutron	CT-603PG / CT-600PR	10 - 100%
Lutron	DV-600PR / DV603PG	10 - 100%
Lutron	DVW-603PGH / DVCL-153P	10 - 100%
Lutron	MACL-153M / TGCL-153P	10 - 100%
Lutron	S-600PR / S-2-LH	10 - 100%