


Project: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Model: \_\_\_\_\_

**Specifications:**

- Die cast aluminum housing.
- Anodized Polypropylene plastic reflector and optics distribution lens.
- Surface anti-ageing electrostatic spray processing, resistance to corrosion.
- Available finishes, Black, White, and Silver
- Lumens 1,700
- Offered Standard in 3000K, 4000K, and 5000K
- IK08 rated.

**Photometric:**

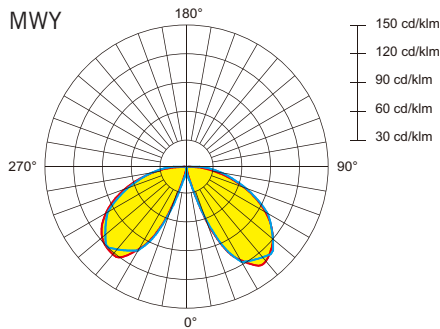

Example: MWY-31-25W-Y-40K-T5-29-BK



Series	Height	Wattage	Voltage	CCT	Beam Type	Mount	Finish
MWY Bollard	<b>31</b> 31.5 inch height	<b>25W</b> 25 Watts	<b>Y</b> Y = 120-277V	<b>30K</b> 3000K	<b>T5</b> T5M	<b>29</b> Achor Bolt	<b>BK</b> Black
	<b>39</b> 39.4 inch height			<b>40K</b> 4000K			<b>WH</b> White
				<b>50K</b> 5000K			<b>SV</b> Silver

Enter configuration: \_\_\_\_\_


\*\* Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

**PERFORMANCE DATA**

Series	MWY
Power	25W
Lumens	1,700
IP Rating	IP65
Operating Temp.	-4°F to 113°F
Input	120-277V

**360° DISTRIBUTION**

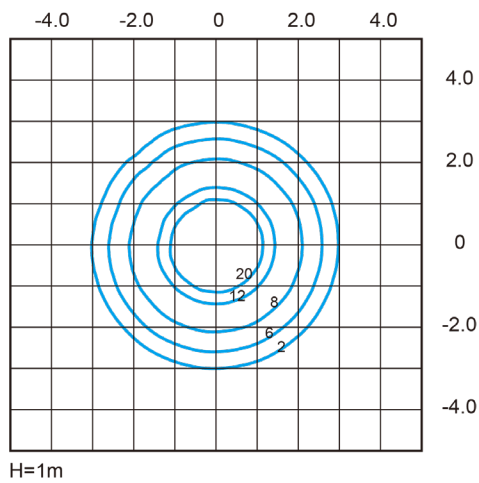

**DIMENSIONS**

