


Project: _____
 Type: _____
 Model: _____

Features:

- HOUSING MATERIALS** | Die-casting dark grey powder coated aluminum.
T=60-80 um. Adhesion of ISO class, 1.ASTM class 4B
- FRONT COVER** | Chromeplated stainless steel SUS 316#
- GLASS LENS** | Tempered step glass. T=8mm
- DIMMABLE** | Not dimmable
- CONCRETE POUR KIT / SLEEVE** | ABS
- WATER-TIGHT CABLE GLAND** | IP68
- COVER LOAD CAPACITY** | 2000kg (4,409lb)
- OPERATING TEMPERATURE** | -4°F to 113°F
- POWER CABLE** | H05RN-F 2X1.0mm² L=0.5m (low voltage)
- FIXTURE IP/ IK Rating** | IP67 Rated / IK10

GLASS PRESSURE CAPACITY



RIAC



Example: RIAC-OL30K-X-SS



Series	Lumens (CCT)			Voltage	Finish
RIAC 3 Watts	OL20K OL (2000K) 10 Lumens	OL30K OL (3000K) 13 Lumens	OL50K OL (5000K) 14 Lumens	X X = 24 Volts	SV Silver


Enter configuration: _____
 ** Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RIAC
Power	3W
Lumens	10 (20K) 13 (30K) 14 (50K)
IP Rating	IP67
Operating Temp.	-4°F to 104°F
Input	24V

DIMENSIONS

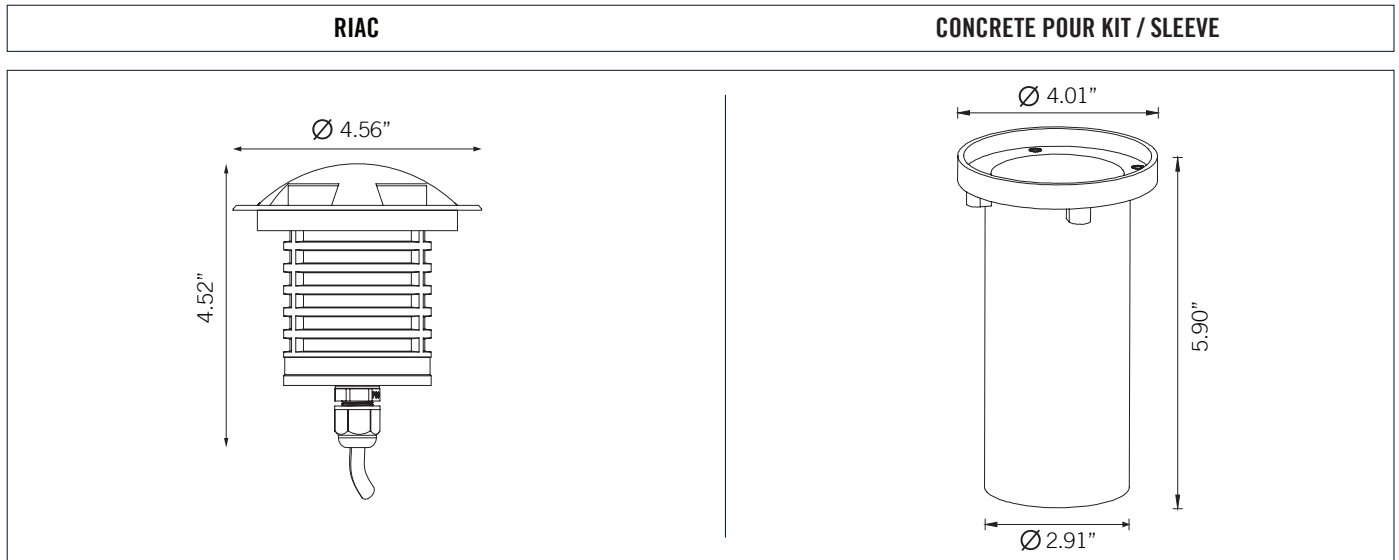

PHOTOMETRIC CURVES

