

Project:	Date
Type:	
Model:	

DL-6-SSE-CCTS

6 INCH SQUARE TRIM SMOOTH / CCT SELECTABLE

DESCRIPTION

Our 6-inch LED square trims offer selectable color temperature settings to suit a variety of applications. Designed for easy installation, they seamlessly retrofit into our LED dedicated housings or most standard 6-inch housings. Available with either a Baffle or Smooth reflector, these trims are also rated for wet locations, ensuring durability and versatility.

PRODUCT SPECIFICATIONS

- White painted spun aluminum.
- Oversized trim ring constructed from one-piece stamped aluminum body
- Torsion spring mounting style are designed to accommodate most 5" and 6" standard and shallow housings.
- E26 medium screw-base Edison adaptor provides easy installation into Incandescent housings.
- (GU10 and GU24 socket adaptor available - sold separately)

LED LIGHT ENGINE


- Dimming down to 10% with CL / TRIAC dimmer (operating at 120V)
- CCT SELECTABLE: 2700K, 3000K, 3500K, 4000K, and 5000K
- CRI 90
- Long life LED chips guaranteed up to 50,000hours.

LISTINGS

- UL Listed
- Wet location rated
- Tested in accordance with IESNA LM79 & LM80



DIMENSIONS

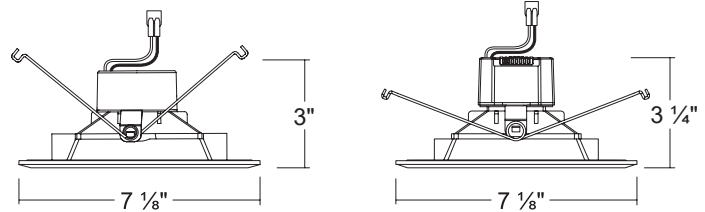

ORDER INFORMATION

EXAMPLE: DL-6-SSE-23-16-CCTS-Z-W



Series	Reflector	Mount	Wattage	CCT Selectable	Voltage	Finish
DL 6 6 inch Trim	SSE Square Smooth Reflector	23 Quick Connect	16 16 Watts	CCTS Selectable Color Temperature (2700K / 3000K / 3500K / 4000K / 5000K)	Z Z = 120V Y Y = 120-277V* (Dimmable at 120V)	W White

Enter configuration: _____

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Watts	Voltage	CRI	Lumens				
			1,260	1,290	1,330	1,360	1,400
16	120V / 120-277V	90	27K	30K	35K	40K	50K

COLOR TEMPERATURE SELECTABLE



TRIAC Dimmer Compatibility (120V)

List of Triac Dimmer Switch		
Mfr	Model #	Dimming Rate
Leviton	1A1505 / 1C1605	10 - 100%
Leviton	6631 / 6633	10 - 100%
Lutron	CT-603PG / CT-600PR	10 - 100%
Lutron	DV-600PR / DV603PG	10 - 100%
Lutron	DVW-603PGH / DVCL-153P	10 - 100%
Lutron	MACL-153M / TGCL-153P	10 - 100%
Lutron	S-600PR / S-2-LH	10 - 100%