RIAC

Drive-over LED in-ground light

Project:	Date
Type:	
Model:	

Features:

HOUSING MATERIALS	Die-casting dark grey powder coated aluminum. T=60-80 um. Adhesion of ISO class, 1.ASTM class 4B
FRONT COVER	Chromeplated stainless steel SUS 316#
DIMMABLE	Not dimmable
CONCRETE POUR KIT / SLEEVE	ABS
WATER-TIGHT CABLE GLAND	IP68
COVER LOAD CAPACITY	2000kg (4,409lb)
OPERATING TEMPERATURE	-4ºF to 113ºF
POWER CABLE	H05RN-F 2X1.0mm^2 L=0.5m (low voltage)
FIXTURE IP/ IK Rating	IP67 Rated / IK10

RIAC-1

RIAC-2



RIAC-4

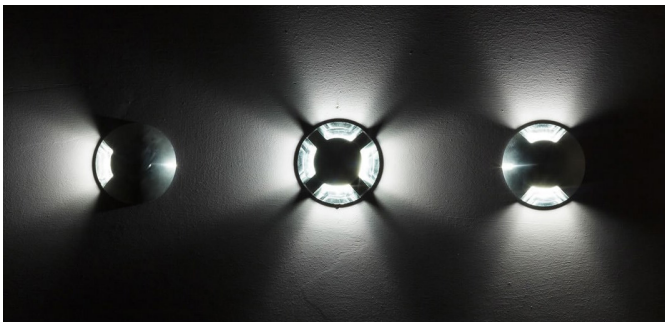

GLASS PRESSURE CAPACITY

2000 kgs (4409 lb)

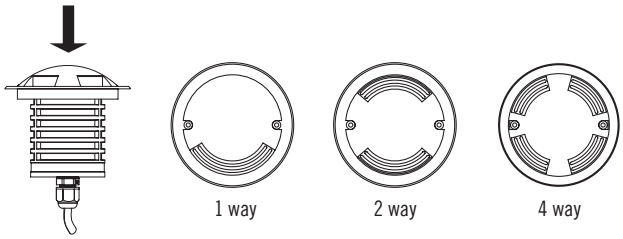

Example: RIAC-1-0L30K-X-SS

Series	Opening	Lumens (CCT)			Voltage	Finish
RIAC 3 Watts	**1** 1 way open **2** 2 way open **4** 4 way open	**0L20K** 0L (2000K) 10 Lumens	**0L30K** 0L (3000K) 13 Lumens	**0L50K** 0L (5000K) 14 Lumens	**X** X = 24 Volts	**SV** Silver

Enter configuration: _____

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RIAC
Power	3W
Lumens	10 (20K) 13 (30K) 14 (50K)
IP Rating	IP67
Operating Temp.	-4ºF to 104ºF
Input	24V

DIMENSIONS

RIAC	CONCRETE POUR KIT / SLEEVE

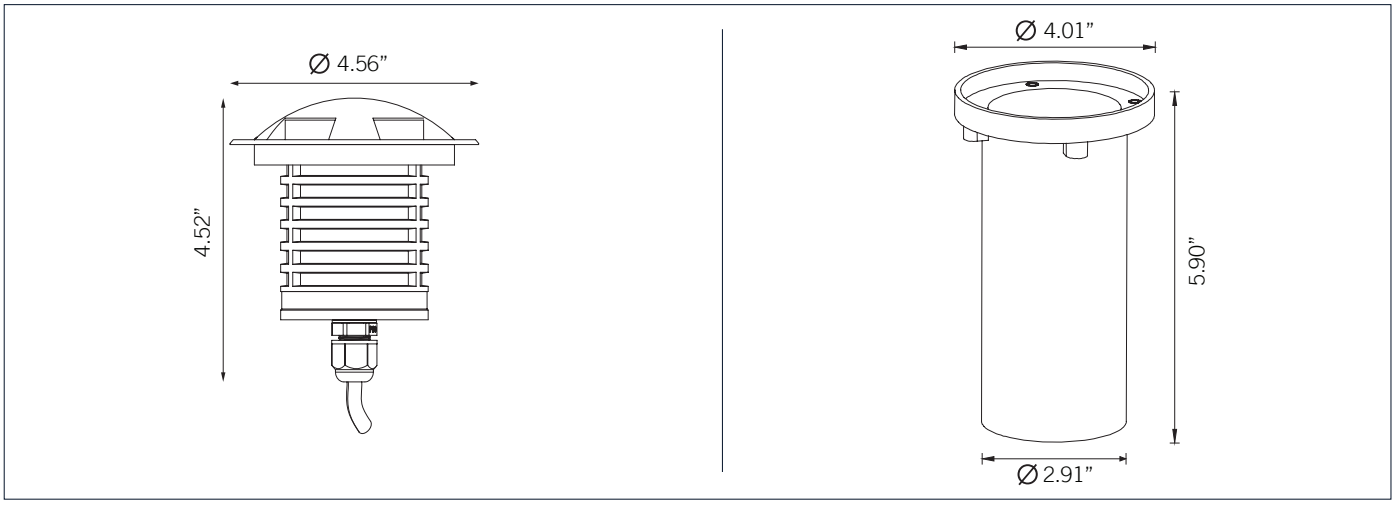
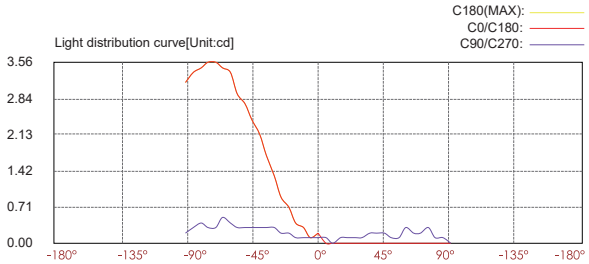
PHOTOMETRIC CURVES