


LED EXIT LIGHT COMBO UNIVERSAL SINGLE/DOUBLE FACE LETTERS

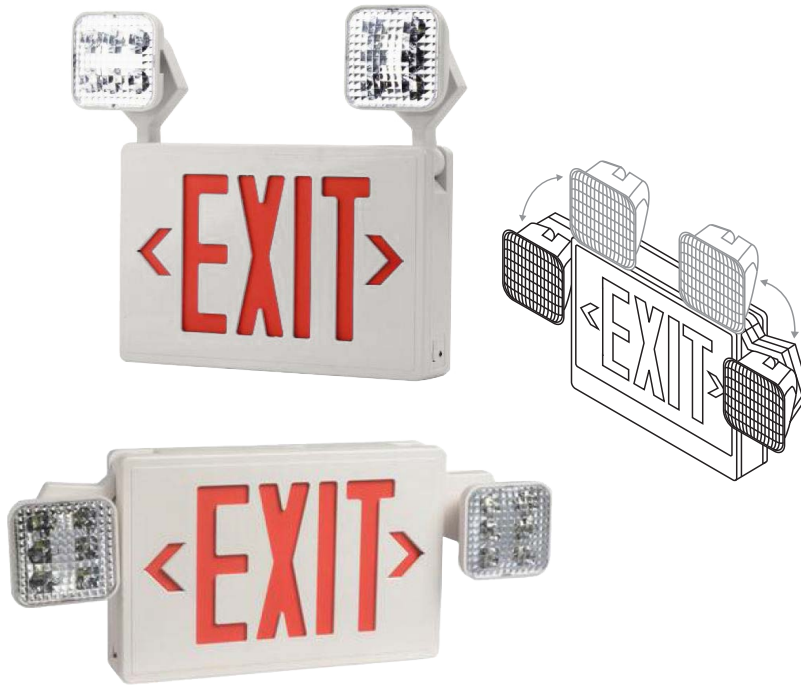

FEATURES

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall and ceiling mounting
- Input Voltage: 120/277VAC 60HZ
- Super bright SMD LED 2x1W
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Battery Backup: ≥90minutes
- Conversion time: <0.2second
- IP Class: IP20
- Insulation: II, Range: 8m²
- Operating Temperature: -14°F~104°F
- 3.6V 300mAh Nickel-Cadmium battery, light last more than 90 minutes after power failure.

HOUSING

Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white finish. Aesthetically pleasing, curved face, rounded corner design. Test switch provided.


MOUNTING

EZ-snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.



WARRANTY

5 year limited warranty on all electronics and housing. Battery pro-rated for five years.

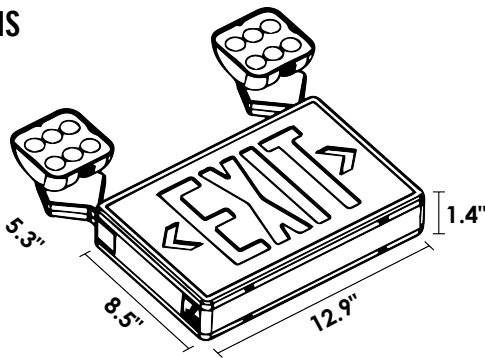DIMENSIONS



EXAMPLE: LE-CXPL-U1-RW-N-2SA

Series	Face No.	Letters	Battery	LED Light	Listings
LE-CXPL	U1 Single/Double	RW (Red) GW (Green)	N Nickel-cadmium batteries	2SA 2 LT Square, adjustable	 

Enter configuration: _____

