

Project:	Date
Type:	
Model:	

SHB-WS240-CCTS High Bay

Wattage & CCT Selectable

PRODUCT DESCRIPTION


The SHB high bay light is truly remarkable, thanks to its built-in Wattage and Color Temperature Selectable (CCT) switch. This versatility allows it to adapt to a wide range of environments. Selectable wattage options are 150W, 200W, and 240W, as well as select your preferred color temperature from 3000K, 4000K, and 5000K. This gives businesses and establishments the flexibility to precisely tailor the lighting to their specific needs.

FEATURES

- CCT & Wattage Selectable
- Efficacy up to 160lm/W, designed to replace 450W and 750W HID.
- Die-cast aluminum housing, and polycarbonate diffuser.
- 110 degree lens guarantees light intensity and light uniformity.
- 90° optic reflector.
- Hook & eye bolt included.
- Optional motion sensor can be offered for maximizing energy savings, and security.
- IP65 Rated / IK08 Rated
- Operating temperature is -20°F to 122°F.
- Power Factor: >0.9
- 0-10V Dimming





Motion Sensor Option Available



ORDER INFORMATION

EXAMPLE: SHB-WS240-Y-CCTS-AL-MS



Series	Wattage Selectable	Voltage	CCT Selectable	Reflector	Mounting	Motion Sensor
SHB High Bay	WS (240W / 200W / 150W)	Y Y = 120-277V	CCTS Selectable Color Temperature (3000K / 4000K / 5000K)	Blank No Reflector PC Polycarbonate Reflector 90° 	Blank Hook & Eye bolt Mount TR Trunnion 	Blank No Sensor MS PIR Motion Sensor IP65 rated / 12Vdc 


Enter configuration: _____

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Model	SHB-WS240
System Power	240W / 200W / 150W
Voltage	120-277VAC / 120-347VAV
Frequency	50/60Hz
Lumen (Max, 5000K)	(38,400lm 32,000lm 24,000lm)
Efficacy	160 lm/W
Diffuser	Polycarbonate
Body materials	Cast Aluminum
Finish	Black
LED type	2835
CCT Selectable	3000K / 4000K / 5000K
CRI	70
PF	>0.9
Beam angel	120°
IP	IP65
IK	IK08
Installation	Hook / Trunnion
Operating Temp.	-20°F to 122°F
Dimmable	0-10V
Net Weight (lbs)	5.51

DIMENSIONS

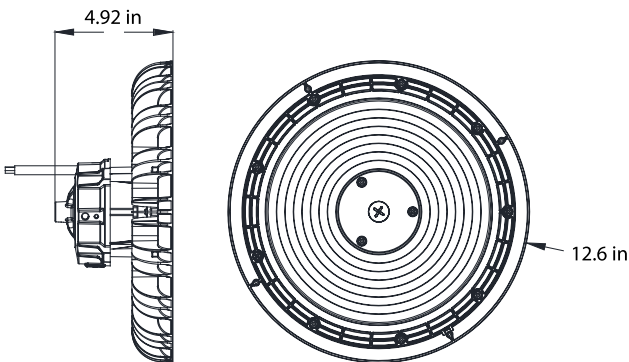

ACCESSORIES



90° PC Reflector
(Sold separately)



Hook
304 stainless steel
(included)



50° adjustable Trunnion
(Sold separately)