

### Product Description


Luminoso 5inch to 6inch Surface Mounted LED Residential Downlight provides advanced dimming parameters with capabilities reaching to as low as 5% and works with most widely available traditional dimmers. It is designed to easily install into existing IC or non-IC Six-inch and some Five-inch housings. It can also be installed directly onto a 4inch or 6inch junction box, making it ideal for applications where recessing the fixture is not an option. Lastly, the SDL's wide beam angle allows for maximum spread often reducing the amount of fixtures necessary.

### Performance Summary

Efficacy:79LPW
Delivered Light Output:790lumens
Rated Power:10watts
CRI:Ra>80
Input Voltage:120VAC
Input Current:0.1A
THD<20%
PF>0.9
Standard Lifespan:Designed minimum 35,000 hours
Standard Warranty: 5 Years
Dimming: Dimmable to 5%-100% with most incandescent dimmers.

Suggest dimmer manufacturers are Lutron & Leviton, recommend dimmer models are:  
 LEVITON: 6683,DECORA-6672  
 LUTRON:SCL-153P,DVCL-153P,TGCL-153P


### Electrical Connection

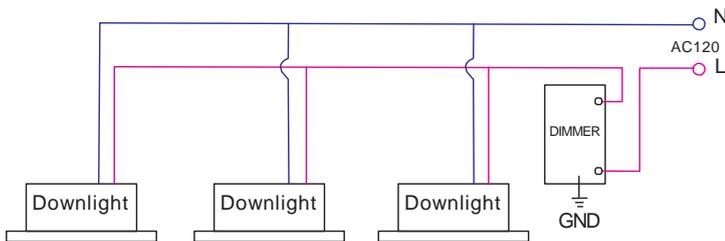

### Accessories



### Dimension

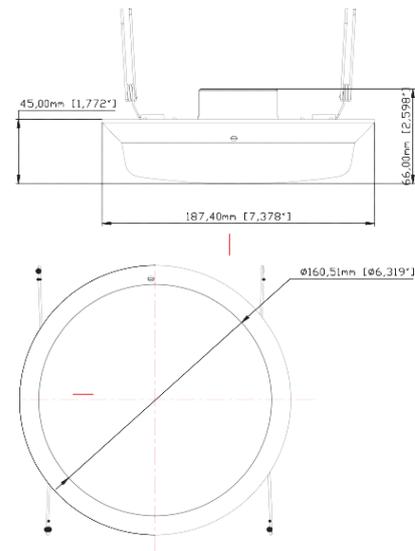

### Order Information

Example: SDL6-10W-XXXX

Category	Product	Size	Wattage	CCT(X)	Cover Type(X)	CRI(X)	Connect Type(X)
S=Surface Mounted	DL	5-6inch	10W=10W	27=2700K 30=3000K 40=4000K 50=5000K	C=Clear F=Frosted	E=80CRI	E=E26 Base G=Gu24