

ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.
- UV-stabilized silver mylar edge lit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver mylar background panel.

FEATURES

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall, side and ceiling mounting
- Input Voltage: 120-277VAC 60Hz
- Bright LED 2 watts
- Test button and charge indicator light
- Backup time: ≥90minutes
- Conversion time: <0.2second
- IP Class: IP20
- Insulation: II
- Operation temperature: 14°F - 104°F
- Overcharge & Over-discharge protection
- 50,000 hours LED lifespan
- 3.6V 300mAh Nickel-Cadmium battery, light last more than 90 minutes after power failure.

HOUSING

Injection-molded, engineering-grade, flame retardant. Ultra bright, energy efficient, long life. The double and single faced sign, utilizes factory installed silver mylar background panel. Test switch provided.


MOUNTING

EZ-snap mounting canopy included for top or end mount. Adjustable backplate with knockouts for wall mount.

Project:	Date
Type:	
Model:	



Example: LE-XEL-U1-RM-N

Series	Face No.	Letter Color	Battery	Listings
LE-XEL Edge lit Exit sign	U1 Single face	RM RED letters Mirror panel	N Nickel-cadmium batteries	
	U2 Double face	GM GREEN letters Mirror panel		

Enter configuration:

** Special Order/ 6-8 weeks


Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

LE XEL U1 / U2

LED Edge Lit Exit Red/Green Single/Double Face Mirrored Panel



DIMENSIONS

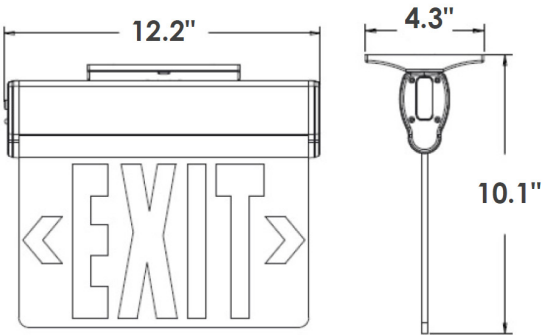

ADJUSTABLE

