



Our Surface Mount lighting designs open up endless possibilities, catering to both commercial and residential spaces. Offering modular lighting solutions with a range of sizes, beam options, and a standard configuration of high visual comfort COB LED, these luminaires provide stunning and sleek surface mount configurations that enhance any environment with their elegant and slender design. Experience the versatility and aesthetic appeal that these surface mounts bring to your entire living or working area, whether it be in a commercial or residential setting.

Feature

- Embrace the versatility of our modular design.
- Choose from COB LED chip options: standard 80+ or optional 90+ for enhanced performance.
- Dimming options: 0-10V with standard 10% dimming, optional 1%, or optional TRIAC dimming.
- Tailor the lighting to your needs with beam angle options of 15°, 24°, 36°, 60° or 100°.
- Light engine available in 4", 6", and 8".
- Surface mount.
- Wattage selection allows for further customization based on your requirements.

Performance

Dimension	Wattage Selectable	Efficacy	Lumens
4"	25W / 18W / 12W	76-100 lm/W	1900 - 2500lm
6"	40W / 30W / 20W	85-110 lm/W	3400 - 4400lm
8"	60W / 45W / 30W	72-95 lm/W	4176 - 5510lm

*Above apply to 3000K, 80+ CRI values only. Check the IES file to gain the other accurate data.



LED Cylinder Surface Light with Selectable Wattage / Product Specifications

Optics

Experience the cutting-edge technology of our advanced lighting solution, driven by a high-efficiency COB LED chip. With an array of versatile beam spread options including 15°, 24°, 36°, 60°, and 100° our fixtures offer precise control over the direction and distribution of light. What sets our product apart is the convenience of interchangeable cylinder beam spreads, allowing effortless swapping in the field without the need for additional tools. Stay in control of your lighting experience with our innovative and adaptable solution.



Finish

Our fixtures are made of rigid die-cast aluminum and feature a standard powder-coated polyester paint finish in white or black.

LED System

COB	COB LED with a 80+ CRI is standard. 90 CRI is also available upon request by consulting the factory. They have been tested in accordance with IESNA LM-80 and the results have shown L80 lumen maintenance greater than 50,000 hours.
CCT	2700K, 3000K, 3500K and 4000K available.
Thermal Management	The lifespan of our product is maximized by our aluminum housing, which serves as an effective heat sink for optimal heat dissipation.

Listings

- cULus listed for damp locations
 - 5 years limited warranty
- NOTE:
- Ensure optimal performance by maintaining ambient temperatures below 104°F during regular operation at the fixture location.
 - For indoor use only

Optional Emergency Battery Backup

We offer an optional emergency Battery Backup, EMBI. In the event of an AC power failure, it promptly switches to the emergency mode, providing illumination for up to 120 minutes. Once AC power is restored, it automatically returns to the charging mode, ensuring compliance with critical life-safety lighting requirements. For more information please contact us.



Electrical

LED Driver	Equipped with a Class 2 high-efficiency LED driver, featuring a standard 0-10V dimming functionality that smoothly dims down to 10%. This dimming capability is compatible with a wide range of control systems, including: Lutron® Diva-DTV, Leviton® IP-710-DL.
THD	<20%
Power Factor	>0.9
Input Voltage	Standard electronic drivers are cULus recognized and available for 110-277V AC or 110~347V AC.

Mounting

For Standard J-box
Easily mount the Cylinder fixture directly to any recessed (standard) J-box, including 3" octagon, 4" octagon, or 4" round sizes. Simplify your installation process with this seamless solution.


NOTE:

- 6" will mount directly on to a standard J-box with no visible canopy.
- 4" and 8" canopy will be visible.



For Pancake J-box / Pan box
When using a surface-mounted or Pancake 4" J-box, we offer a Ø5.97" round canopy that is 2.38" deep with a conduit cutout for easy installation. The canopy features four key slots, one on each side, allowing seamless configuration to fit any ceiling layout using 1/2" or 3/4" conduit. You can choose from a white or a black powder coat painted finish for the conduit cutout canopy, ensuring a sleek and adaptable solution for your mounting needs.

Conduit Knockout Canopy Option

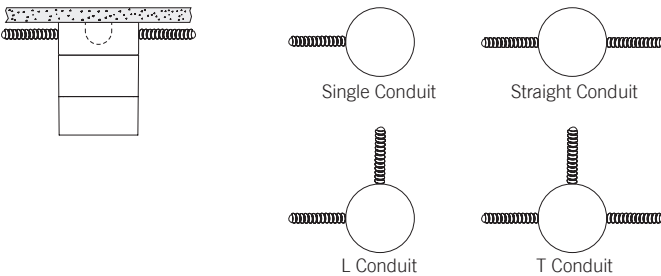

Emergency Lumen Output:

Fixture Efficacy	Output Power 8w
80 lm/w	640 Lumens

LCS Wall / Surface Mount Series

LED Cylinder Light with Selectable Wattage / Ordering Guide

Project:	Date
Type:	
Model:	


Ordering Chart

Example: LCS-6-30K-Y-W-90-10-CP-WH-RB

Series	Size (Selectable Wattage)	CCT	Voltage	Beam Options	CRI Options	Dimming Options	Mounting Options	Finish	Trim Options
LCS Cylinder Surface	4 4in (25W / 18W / 12W)	27K 2700K	Y 120-277V	N Narrow Beam 15°	80 80+ CRI (Standard)	0-10V 10 0-10V Dims down to 10%	SP Cover plate for Standard J-Box	WH White BK Black	Reflector Trim Color RW White RB Black RG Gold RC Chrome
	6 6in (40W / 30W / 20W)	30K 3000K		M Medium Beam 24°	90 90+ CRI (Optional)	0-10V / TRIAC 01 Dim to 1% Or TRIAC Dimming (Programmable driver with factory-set wattage and operating parameters; not field-adjustable.)	CP Cover plate w/ Conduit Knockouts, for pancake J-Box / Pan box		
	8 8in (60W / 45W / 30W)	35K 3500K 40K 4000K		W Wide Beam 36°			WM Wall Mount 		
				F Flood Beam 60°					
				DF* Diffuser Beam 100° 					

* Diffuser (100° beam) for 4 inch and 6 inch only.



Mounted to Standard J-box

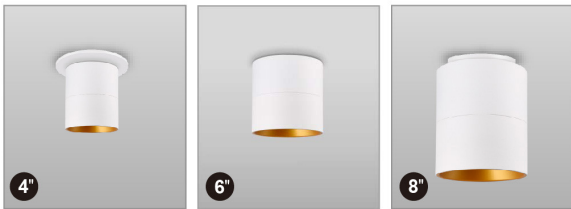



Aluminum Reflector Options




Mounted w/ Knockouts for conduit

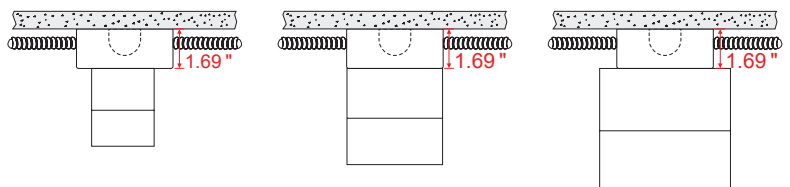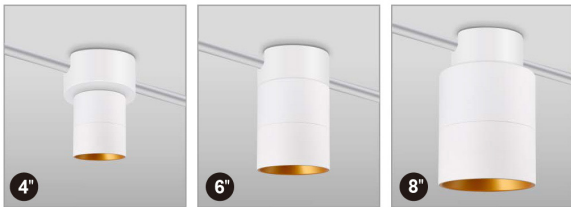

Wall Mounted

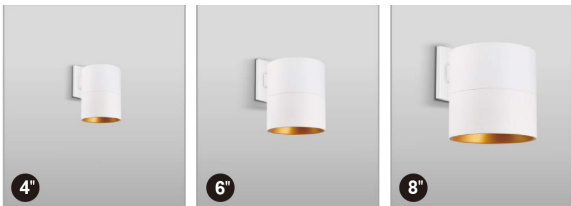

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

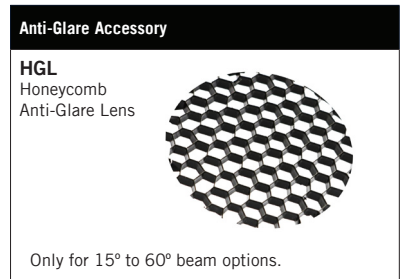

LED Cylinder Light with Selectable Wattage / Performance Data / Dimensions

Performance Data


Wattage Selectable	2700K		3000K		3500K		4000 K	
	Ra>80	Ra>90	Ra>80	Ra>90	Ra>80	Ra>90	Ra>80	Ra>90
25w/18w/12w	2250lm 90lm/w	1900lm 76lm/w	2375lm 95lm/w	2000lm 80lm/w	2450lm 98lm/w	2050lm 82lm/w	2500lm 100lm/w	2100lm 84lm/w

Wattage Selectable	2700K		3000K		3500K		4000K	
	Ra>80	Ra>90	Ra>80	Ra>90	Ra>80	Ra>90	Ra>80	Ra>90
40w/30w/20w	4000lm 100lm/w	3400lm 85lm/w	4200lm 105lm/w	3560lm 89lm/w	4320lm 108lm/w	3640lm 91lm/w	4400lm 110lm/w	3720lm 93lm/w


Wattage Selectable	2700K		3000K		3500K		4000K	
	Ra>80	Ra>90	Ra>80	Ra>90	Ra>80	Ra>90	Ra>80	Ra>90
58w/45w/30w	4930lm 85lm/w	4176lm 72lm/w	5220lm 90lm/w	4408lm 76lm/w	5394lm 93lm/w	4524lm 78lm/w	5510lm 95lm/w	4640lm 80lm/w

Dimensions


4 INCH



6 INCH

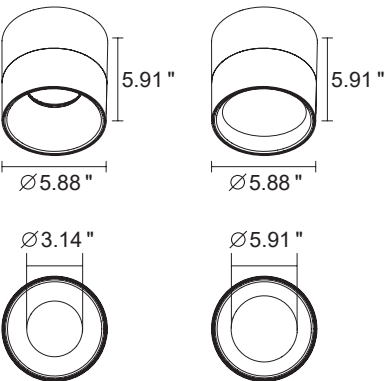

8 INCH

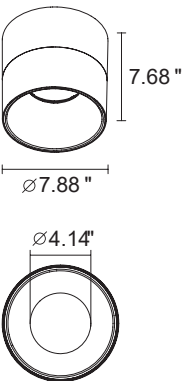

Configuration




Trim Reflector



Frosted Diffuser

LED Cylinder Light with Selectable Wattage / Photometrics

4" / 3000K / 60°

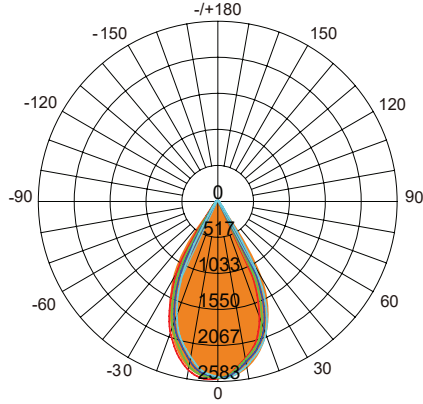

AVERAGE BEAM ANGLE(50%): 61.0°

Test Number: CY4R-SP30F
Lumens: 2612.6 Lm
Watts: 25 W
LPW: 103.94 Lm/W
CCT: 3000K

UNIT: cd
— C0/180,61.0°
— C30/210,61.1°
— C60/240,61.1°
— C90/270,60.7°

Zonal Flux Diagram

Y	C0	C45	C90C	135	C180
10	2751	2786	2868	2917	2931
20	2335	2466	2558	2593	2538
30	1094	1535	1818	1905	1800
40	155.1	194.4	245.3	438.2	400.3
50	62.68	63.03	65.58	79.00	102.6
60	44.26	44.48	45.54	54.19	62.64
70	23.80	23.01	22.92	28.39	34.03
80	2.913	5.007	6.675	7.312	11.58
90	0.1544	0.1118	0.3414	0.4778	0.2661
100	0.0980	0.1167	0.1027	0.1260	0.1499
110	0.1725	0.2939	0.8678	0.2707	0.6863
120	0.3081	0.3082	0.3596	0.3502	0.7190
130	0.8022	0.6450	0.4290	0.4484	0.8034
140	2.066	1.785	1.408	1.243	1.589
150	3.714	3.274	2.851	2.718	3.120
160	5.316	4.917	4.461	4.184	4.698
170	6.381	6.205	6.044	5.930	6.233
180	6.788	6.806	6.652	6.657	6.797
DEG	LUMINOUS INTENSITY:cd				


Zona I Lumens

Y	φ total
0-10	275.7
10-20	1016
20-30	1941
30-40	2403
40-50	2499
50-60	2552
60-70	2587
70-80	2603
80-90	2605
90-100	2605
100-110	2605
110-120	2606
120-130	2606
130-140	2607
140-150	2609
150-160	2610
160-170	2612
170-180	2613
UNIT: lm	

Luminance cd/(m2)

G(DEG)	C0/180	C90/270
85	2079	6732
80	2892	6628
75	8458	9206
70	11997	11556
65	13945	13764
60	15263	15703
55	16203	17152
50	16813	17592
45	17695	27503

6" / 3000K / 60°

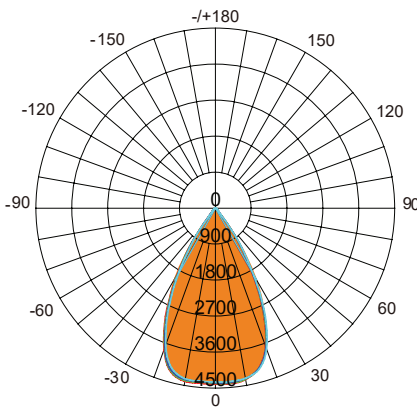

AVERAGE BEAM ANGLE(50%): 59.6°

Test Number: CY6R-SP30F
Lumens: 5046.4 Lm
Watts: 45 W
LPW: 111.38 Lm/W
CCT: 3000K

UNIT: cd
— C0/180,59.5°
— C30/210,59.5°
— C60/240,59.6°
— C90/270,59.6°

Zonal Flux Diagram

Y	C0	C45	C90	C135	C180
10	5529	5511	5486	5486	5576
20	4834	4887	4923	4940	4963
30	2643	2758	2803	2894	2818
40	433.5	487.4	508.0	551.8	472.2
50	100.6	104.4	102.4	105.5	99.85
60	72.33	72.16	70.84	70.56	71.23
70	44.46	45.15	44.15	44.05	43.76
80	18.19	18.90	17.92	18.39	18.56
90	0.1782	0.1447	0.1496	0.1447	0.1447
100	0.1727	0.1868	0.1494	0.1821	0.1729
110	0.2565	0.2615	0.2147	0.2568	0.2569
120	0.3688	0.3923	0.3823	0.3596	0.3737
130	1.082	1.047	0.9929	0.9770	1.080
140	3.232	3.112	3.031	2.920	3.318
150	6.392	6.202	6.089	5.889	6.530
160	9.529	9.302	9.245	9.017	9.601
170	12.21	12.07	11.91	11.77	12.11
180	13.29	13.37	13.15	13.16	13.31
DEG	LUMINOUS INTENSITY:cd				


Zona I Lumens

Y	φ total
0-10	526.3
10-20	2017
20-30	3780
30-40	4714
40-50	4863
50-60	4936
60-70	4993
70-80	5025
80-90	5033
90-100	5033
100-110	5033
110-120	5033
120-130	5034
130-140	5036
140-150	5039
150-160	5042
160-170	5045
170-180	5046
UNIT: lm	

Luminance cd/(m2)

G(DEG)	C0/180	C90/270
85	5141	5059
80	6800	6703
75	7678	7640
70	8441	8382
65	9032	8906
60	9393	9200
55	9336	9072
50	10163	10349
45	14737	15549

LED Cylinder Light with Selectable Wattage / Photometrics

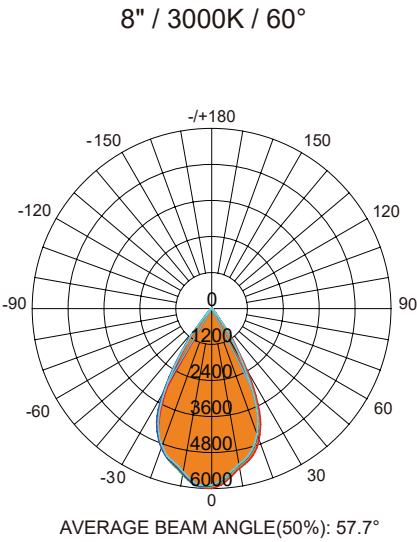

Test Number: CY8R-SP30F
Lumens: 6000.6 Lm
Watts: 60 W
LPW: 95.85 Lm/W
CCT: 3000K

UNIT: cd
C0/180,57.5°
C30/210,57.8°
C60/240,58.0°
C90/270,57.5°

Zonal Flux Diagram					
Y	C0	C45	C90	C135	C180
10	6752	6641	6582	6635	6997
20	5798	5610	5550	5774	6119
30	2943	2631	2544	3088	3598
40	323.2	281.4	268.1	369.4	569.4
50	101.4	92.02	90.41	103.3	137.4
60	66.11	63.45	62.41	64.37	68.46
70	40.56	38.05	37.37	39.94	43.13
80	16.48	14.58	14.33	16.84	19.29
90	0.1635	0.1495	0.1728	0.1494	0.6340
100	0.1633	0.2008	0.1867	0.1961	0.1821
110	0.2426	0.2895	0.2613	0.2755	0.2615
120	0.4150	0.4624	0.4521	0.4110	0.3877
130	1.310	1.501	1.445	1.183	1.038
140	4.020	4.396	4.323	3.738	3.636
150	7.830	3.274	2.851	2.718	3.120
160	11.69	12.09	12.00	11.29	11.30
170	15.06	15.17	14.99	14.64	14.78
180	16.06	16.06	15.84	15.86	16.12
DEG	LUMINOUS INTENSITY:cd				

Zonal Lumens	
Y	φ total
0-10	670.6
10-20	2462
20-30	4629
30-40	5655
40-50	5820
50-60	5892
60-70	5945
70-80	5976
80-90	5984
90-100	5985
100-110	5985
110-120	5985
120-130	5986
130-140	5988
140-150	5991
150-160	5995
160-170	5999
170-180	6001
UNIT: lm	

Luminance cd/(m2)		
G(DEG)	C0/180	C90/270
85	2815	2099
80	3569	3101
75	4060	3666
70	4458	4108
65	4761	4451
60	4970	4692
55	5058	4836
50	5932	5288
45	9205	8235