

5-6" Round Dome Downlight/Surface

Project: _____

Type: _____

Model# _____

DESCRIPTION

6" surface mount/recessed LED trim, is compatible with most 5 & 6" standard recessed new construction and remodel housings. Universal mounting hardware allows mounting to all standard 4 inch junction boxes. Optional Recessed Housing Adapter available.

PRODUCT SPECIFICATIONS

- White painted spun aluminum body.
- Oversized trim ring constructed from one-piece spun aluminum body.
- Torsion spring mounting accessories are designed to accommodate most 5" and 6" standard and shallow housings.
- E26 medium screw-base Edison adapter provides easy installation into Incandescent housings.
- (GU10 and GU24 socket adapter available - sold separately)

LED LIGHT ENGINE

- Protected LED driver performs at 120-277V.
- Dimming down to 5% with most TRIAC dimmers (@120V)
- CCT: 2700K, 3000K, 4000K, 5000K available Operating
- Temperature: -15°F to 104°F
- Long life LED chips guaranteed up to 50,000 hours.

LISTINGS


- UL classified
- Suitable for wet locations.
- Suitable for use in closets, compliant with NFPA® 70
- Tested in accordance with IESNA LM79 & LM80
- Compatible dimmers, SCL-153P, CTCL-153P, DVCL-153P, MACL-153M

PERFORMANCE DATA


CCT	Lumens	Watts	CRI	Input Voltage	Frequency
2700K	1,040 Lm	12W	90	120-277V	50/60Hz
3000K	1,050 Lm				
4000K	1,100 Lm				
5000K	1,150 Lm				




DIMENSIONS

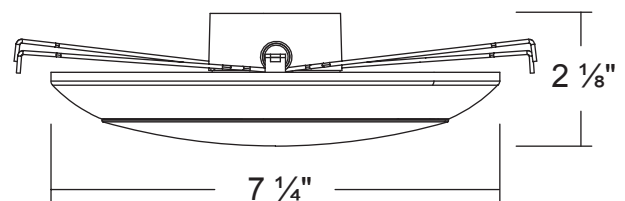


ACCESSORY KIT

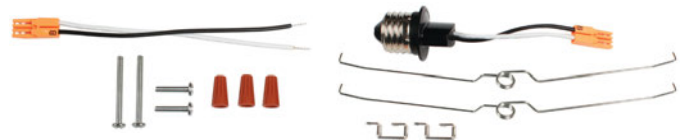

J - Box Installation

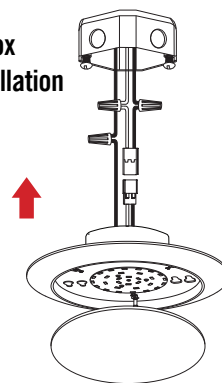

Can Installation

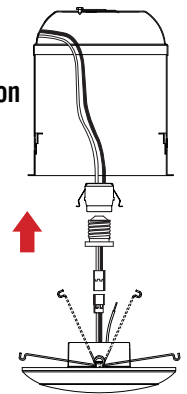

Series	Reflector	Mount	Watts	CCT	Beam	Voltage
DL-6	RD = Round Dome	23 J-Box or E26	12W	27K = 2700K 30K = 3000K 40K = 4000K 50K = 5000K	120°	Y = 120-277VAC

Enter configuration: _____ / Example: DL 6 RD 23 12W 40K W Y

