

Project:	Date
Type:	
Model:	


Features:

HOUSING MATERIALS	Coated aluminum, anodized powder coating. T=60-80 um. Adhesion of ISO class, 1.ASTM class 4B
GLASS LENS	Tempered step glass. T=4mm
DIMMABLE	Not dimmable
CABLE GLAND	IP68
GASKET	Tooling shaped seal
PCB	Excellent heat conductivity aluminum.
SPIKE	ABS
OPERATING TEMPERATURE	-4°F to 113°F
POWER CABLE	H05RN-F 2X1.0mm ² L=2.0m (low voltage)
FIXTURE IP/ IK Rating	IP66 Rated / IK02

OPTICS



FINISH OPTIONS

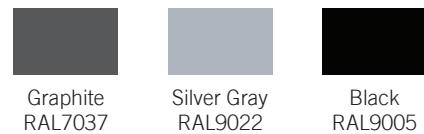

Example: RGM-7L30K-D30-X-BK



Series	Lumens (CCT)			Beam Angle					Voltage	Accessory	Finish
RGM 13.2 Watts	7L20K 7L (2000K) 710 Lumens	7L30K 7L (3000K) 775 Lumens	8L40K 8L (4000K) 800 Lumens	D9 9°	D15 15°	D20 20°	D30 30°	D45 45°	X X = 24 Volts Requires remote 24V transformer.	Leave Blank Standard SHR-3001 Optional Shroud	BK Black GR Graphite SG Silver Gray


Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RGM
Power	13.2W
Lumens	710 (20K) 775 (30K) 800 (40K)
IP Rating	IP66
Operating Temp.	-4°F to 104°F
Input	24V

DIMENSIONS

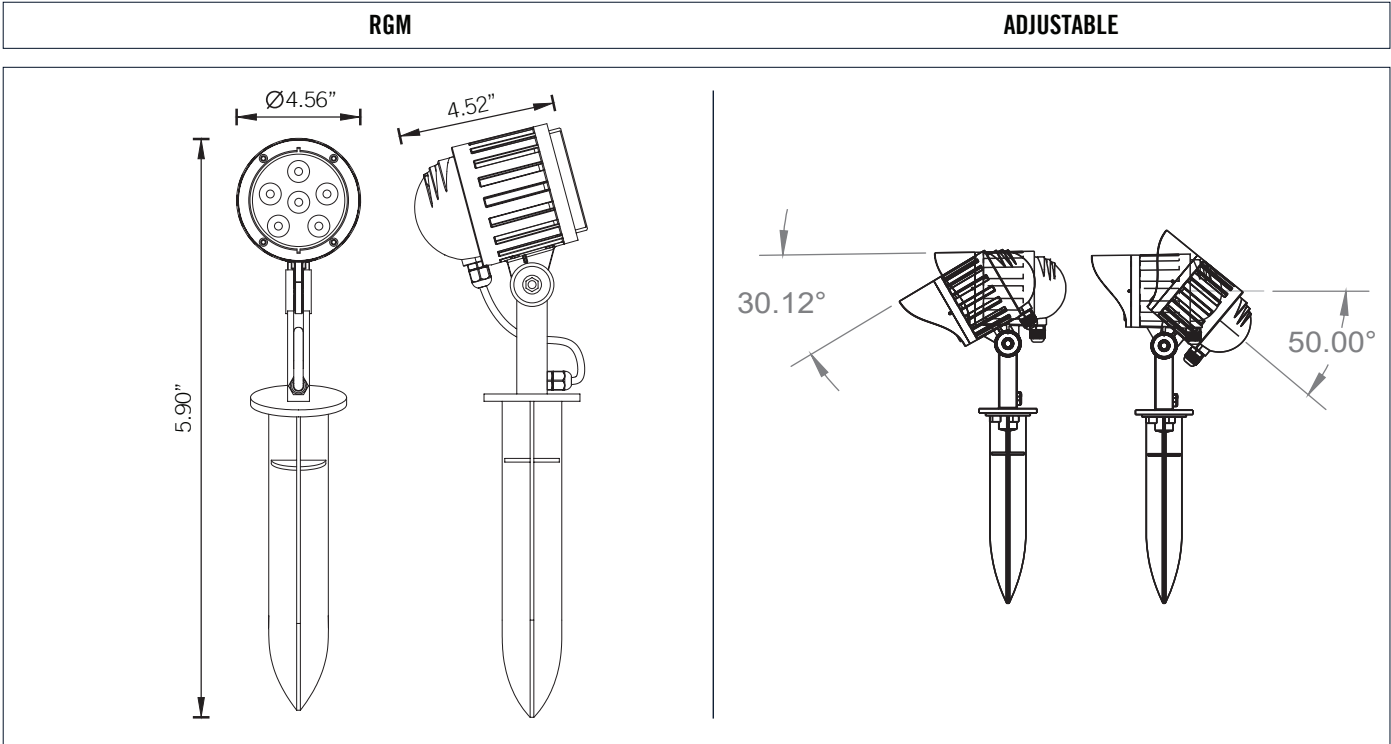

PHOTOMETRIC CURVES

