

Project:	
Type:	
Model#	

SRF Series LED Flush Mount Light

Features & Benefits


- Polycarbonate injection mold housing, with silicon gasket to guarantee **IP66** protection.
- Opal polycarbonate diffuser with UV protection.
- Vandal proof, high impact resistant **IK10**. Quick connection system.
- Easy installation with 304 stainless fixation to the ceiling
- 5 years guarantee.

Specification

Input Voltage	120-277VAC
Power rating	30 Watt
Lumens	2,550
Efficacy	85 Lm/W
CRI	>80
Finish	White/Bronze/Black
Impact resistance	IK10
IP rating	IP66
Power Factor	≥0.9
Operating Temp	-4°F ~ +104°F
Certificate	UL
Warranty	5 Years
Dimmable	Yes**



Quick connection system →

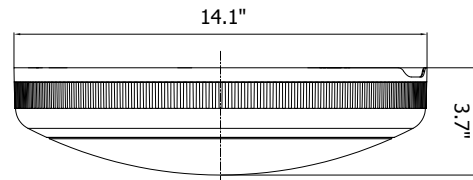

ORDER INFORMATION

EXAMPLE: SRF-14-30W-40K-J-Y-WH



Series	Mount	Wattage	CCT	Beam	Voltage	Finish	Option
SRF	14 = Direct Mount	30W	30K = 3000K 40K = 4000K 50K = 5000K	J = 120°	Y = 120-277V	WH = White BK = Black**	Leave Blank = No Dimming DIM = Dimmable**

Enter configuration: _____

** Special Order / contact vendor

