


Project: _____
 Type: _____
 Model: _____

Features:

- HOUSING MATERIALS** | Die-casting dark grey powder coated aluminum.
T=60-80 um. Adhesion of ISO class, 1.ASTM class 4B
- FRONT COVER** | Die-cast aluminum, powder coated.
- GLASS LENS** | Tempered step glass. T=8mm
- DIMMABLE** | Not dimmable
- J-BOX** | ABS
- WATER-TIGHT CABLE GLAND** | IP67
- OPERATING TEMPERATURE** | -4°F to 113°F
- POWER CABLE** | H05RN-F 2X1.0mm² L=0.5m (24 Volts)
- FIXTURE IP/ IK Rating** | IP65 Rated / IK10

FINISH OPTIONS

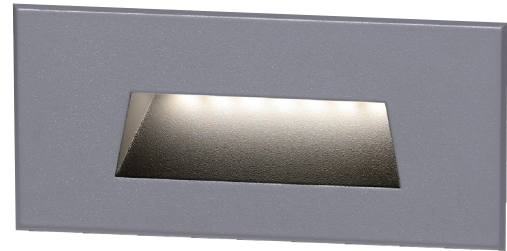

RSA



Example: RSA-0L20K-X-SV



Series	Lumens (CCT)			Voltage	Finish
RSA 3.5 Watts	0L20K 0L (2000K) 57 Lumens	0L30K 0L (3000K) 70 Lumens	0L40K 0L (4000K) 75 Lumens	X X = 24 Volts Requires remote 24V transformer. This fixture is not dimmable*	BK Black WH White GR Graphite SV Silver BZ Bronze

Enter configuration: _____


** Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RSA
Power	3.5W
Lumens	57 (20K) 70 (30K) 75 (50K)
IP Rating	IP65
Operating Temp.	-4°F to 104°F
Input	24V

DIMENSIONS

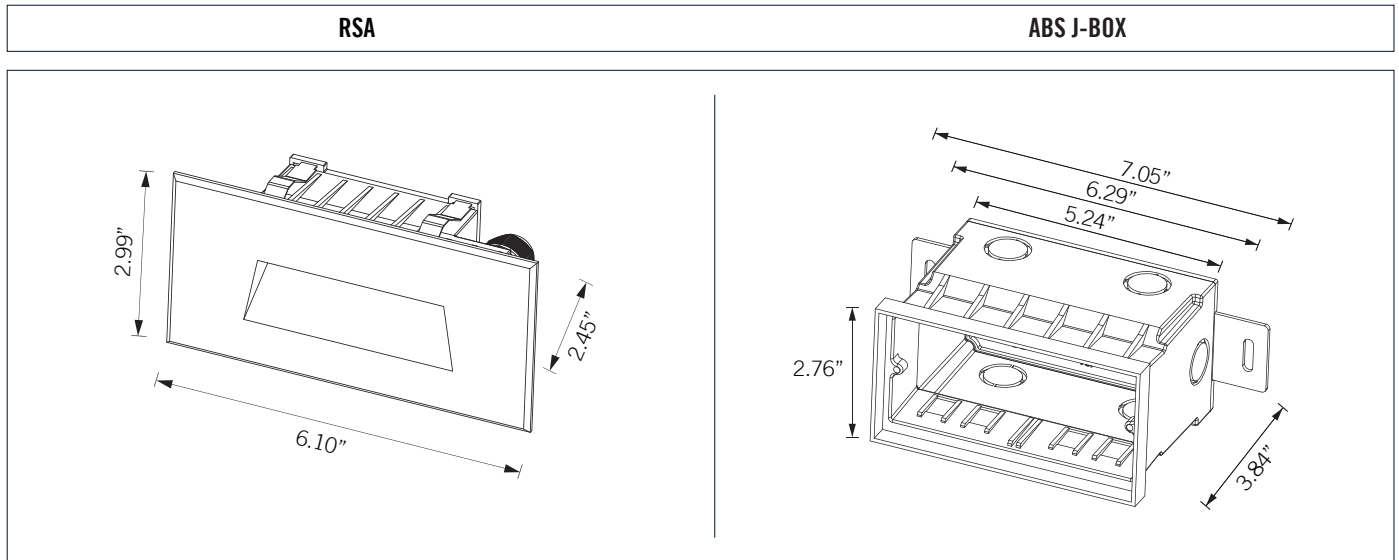

PHOTOMETRIC CURVES

