

Project		Date
Type		
Model		

MWPK3 WS CCTS Wall Pack


CCT & Power Selectable

Specifications:

- Die cast aluminum housing.
- UV coated Polycarbonate lens provides outstanding performance, uniformity and glare control.
- Replaces 100W and 400W Metal Halide.
- Wattage Selectable.
- CCT Selectable, can be changed to 3000K/4000K/5000K.
- Lumen Packages from 1,430 to 12,470 Lumens.
- Efficacy 118 - 131lm/W
- Standard colors: Bronze and White.
- Each LED module is 100% tested prior to assembly.
- IP65 rated.
- IK10 Rated.
- 120-277VAC 50/60Hz.
- Photocell optional.
- 8W Emergency Battery Back-up (option)



CCT & Power Level Selectable



ACCESSORIES

Photocell

No. PC-JL-120-277V

USE: Photocell is field installed or pre-installed in factory by requesting



ORDER INFORMATION

EXAMPLE: MWPK3-WS45-Y-CCTS-BZ



Series	Wattage Selectable	Voltage	CCTS	Finish
MWPK3 Wall Pack	WS27 (27W / 21W / 15W / 10W)	Y 120-277V	CCTS (Color Temp. Selectable) 3000K / 4000K / 5000K	BZ Bronze WH White
	WS45 (45W / 34W / 26W / 18W)			
	WS62 (63W / 52W / 39W / 26W)			
	WS70 (71W / 54W / 42W / 28W)			
	WS100 (100W / 79W / 62W / 41W)			

Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

ADJUSTABLE LUMEN OUTPUT TABLE


PERFORMANCE DATA		27W		45W		62W		70W		100W	
SETTING	DIFFUSER	SYSTEM WATTS	LUMENS (5000K)	SYSTEM WATTS	LUMENS (5000K)	SYSTEM WATTS	LUMENS (5000K)	SYSTEM WATTS	LUMENS (5000K)	SYSTEM WATTS	LUMENS (5000K)
100%	PC Diffuser	26.60	3469.90	45.22	5495.70	63.73	7814.20	71.61	9246.60	100.90	12468.10
80%	PC Diffuser	20.77	2805.82	33.79	4341.60	52.19	6640.51	53.90	7434.27	78.80	10160.25
60%	PC Diffuser	15.38	2163.14	26.24	3527.69	39.29	5255.05	41.63	6018.61	61.62	8581.79
40%	PC Diffuser	9.86	1428.21	17.76	2514.28	26.07	3675.80	27.89	4257.13	40.83	6089.42

ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	670	27	120	0.23
		27	208	0.13
		27	240	0.11
		27	277	0.10
1	1120	45	120	0.38
		45	208	0.22
		45	240	0.19
		45	277	0.16
1	1650	62	120	0.52
		62	208	0.30
		62	240	0.26
		62	277	0.22
1	1750	70	120	0.58
		70	208	0.34
		70	240	0.29
		70	277	0.25
1	2600	100	120	0.83
		100	208	0.48
		100	240	0.42
		100	277	0.36

DIMENSIONS

Small size: 27W/45W/62W

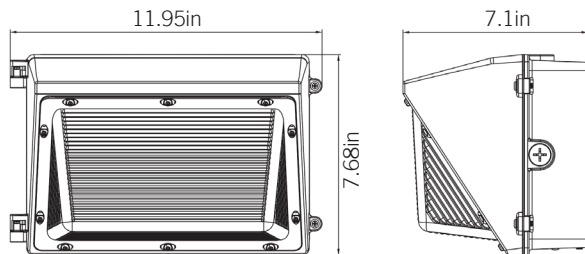

Large size: 70W/100W

