


Project: _____
 Type: _____
 Model: _____

Features:


- HOUSING MATERIALS** | Extruded aluminum alloy, Die-casting, Powder coating, T=60~80 um./Adhesion of ISO class, 1.ASTM class 4B
- FINISH** | Black / White / Graphite / Silver / Bronze
- REFLECTOR** | Optical reflector, 120°
- LED** | NICHIA
- OPERATING TEMPERATURE** | -4°F to 104°F
- POWER CABLE** | H05RN-F 3X1.0mm² L=0.3m (High voltage)
- IP / IK Rating** | IP65 Rated / IK06

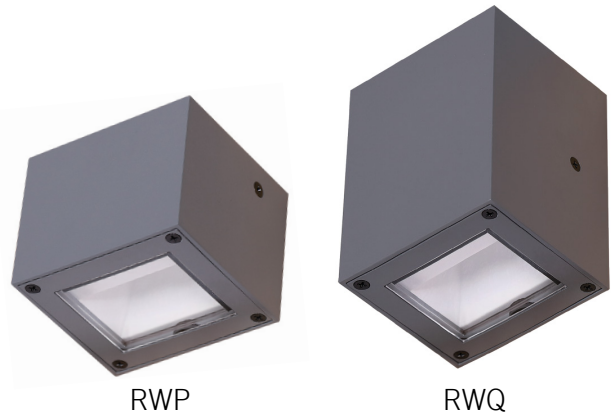

RWP

RWQ

OPTICS

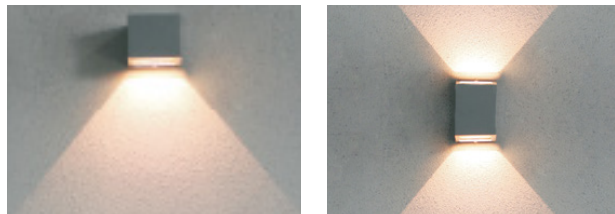

D120

D120 / U120

FINISH OPTIONS



Black
RAL9005

White
RAL9003

Graphite
RAL7037

Silver
RAL9006

Bronze
RAL8019

Example: RWP-1L30K-D120-Z-SV



Series	Lumens (CCT)			Down Beam	Up Beam	Voltage	Finish
RWQ 2x4 Watts	1L30K 1L (3000K) 100x2 Lumens	1L40K 1L (4000K) 101x2 Lumens	1L50K 1L (5000K) 155x2 Lumens	D120 120°	U120 120°	Z Z = 120 Volts	BK Black WH White GR Graphite SV Silver BZ Bronze
RWP 4 Watts	1L30K 1L (3000K) 155 Lumens	2L40K 2L (4000K) 200 Lumens	2L50K 2L (5000K) 240 Lumens	D120 120°	N/A		

Enter configuration: _____


** Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.



PERFORMANCE DATA

Series	RWP	RWQ
Power	4W	4Wx2
Lumens	155 (30K) 200 (40K) 240 (50K)	100* ² (30K) 101* ² (40K) 155* ² (50K)
IP Rating	IP65	IP65
Operating Temp.	-4°F to 104°F	-4°F to 104°F
Input	120V	120V

DIMENSIONS

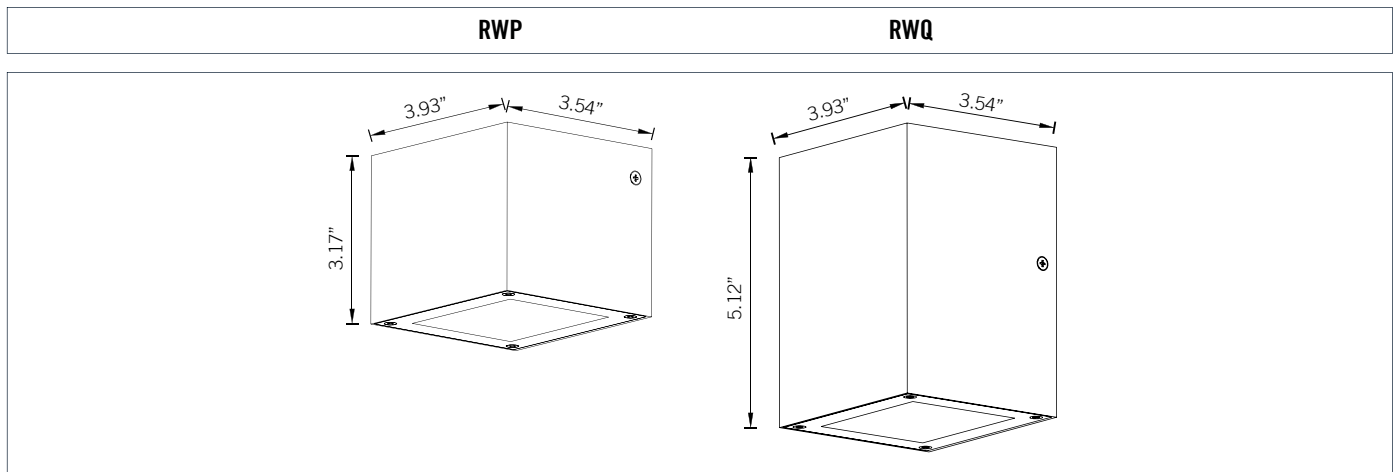



PHOTOMETRIC CURVES

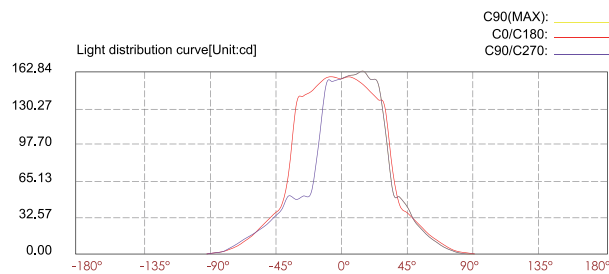

Lux distance curve

Center beam LUX	Beam width V	H
2m	1.8m	2.8m
4m	3.7m	5.6m
6m	5.5m	8.5m
8m	7.3m	11.3m
10m	9.2m	14.1m
12m	11.0m	16.9m

Ver.Spread:49.3 Horiz.Spread:70.4

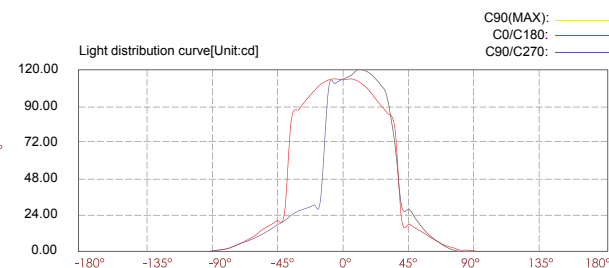

Lux distance curve

Center beam LUX	Beam width V	H
2m	1.8m	3.0m
4m	3.7m	6.0m
6m	5.5m	9.0m
8m	7.4m	12.0m
10m	9.2m	15.0m
12m	11.1m	18.0m

Ver.Spread:49.5H Horiz.Spread:73.8