

Project: _____
 Type: _____
 Model: _____

DL 2HD SS

2 INCH LED SQUARE SMOOTH MODULE-TRIM

DESCRIPTION

The Luminoso LED trims are designed for use with Luminoso 2" Dedicated housings. The 2" LED trim is the perfect solution low to medium height ceilings in residential and light commercial applications. Its small aperture makes it ideal for strategic placement where space is limited and energy savings is important.

ELECTRICAL

Current : 350mA

LED ENGINE

CCT: 2700K, 3000K, 3500K, 4000K (90 CRI).

Wattage: 9W

Optics: 38° (Flood)


FEATURES

LED Life: 50,000 Hours

Operating Temperature: -20°F to 113°F

Warranty: 5 year limited warranty

IP54 Rated (Splashing water)



Watts	CRI	CCT	Lumens	Input Voltage	Frequency
9W	90	2700K	581	120-277V	50/60Hz
		3000K	628		
		3500K	687		
		4000K	656		

Compatible Housings (Order Separately)	Rating	Model	Installation	Input	Dimming
	IC-Rated	DLH 2TD N 23 Y ICAH	New Construction	Y = 120-277V	0-10V
		DLH 2TD N 23 Z ICAH		Z = 120V	TRIAC / CL
	NON-IC	DLH 2TD N 23 Y A	New Construction	Y = 120-277V	0-10V
		DLH 2TD N 23 Y ICA		Y = 120-277V	0-10V
	NON-IC	DLH 2TD R 23 Y	Remodel	Y = 120-277V	0-10V
		DLH 2TD R 23 Z		Z = 120V	TRIAC / CL



Example: DL-2HD-SS-23-9-40K-Y-W

Series	Trim	Mount	Watts	CCT	Voltage	Finish
DL 2HD	SS Square Smooth	23 Quick Connect	9 9 Watts	27K 2700K 30K 3000K 35K 3500K 40K 4000K	Y 120--277V	W White

Enter configuration: _____

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

DL 2HD SS

2 INCH LED SQUARE SMOOTH MODULE-TRIM




PHOTOMETRY / 3000K

DL 2HD RS

System Power	:8.9 W
Test Date	:3/2016
Beam Angle 50%	:36.4°
Field Angle 10%	:59.9°
Color Temperature	:3000K
CRI	:90.0
R9 Value	:73.0
Lumens Delivered	:630Lm
CBCP	:1,389cd
Power Factor	:0.89

CANDELA TABULATION

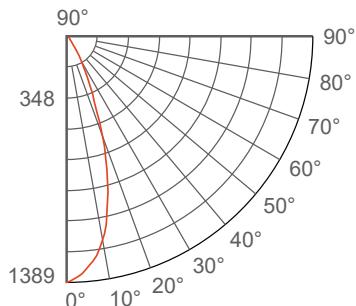

FOOTCANDLE DISTRIBUTION

