

## ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.
- UV-stabilized ultra-clear acrylic lens provides consistent, and uniform illumination.

## FEATURES

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall mounting
- Input Voltage: 120/277VAC 60Hz
- Standard LED 2x1.2W
- 3.6V Nickel Cadmium Battery
- Test button and charge indicator light
- Backup time: ≥90minutes
- Conversion time: <0.2second
- IP Class: IP20
- Insulation: II, Range: 8m²
- Operating Temperature: 14°F to 104°F
- Overcharge & Over-discharge protection
- Dimension: 13.6 x 4.1 x 3.1 IN


## HOUSING

Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white finish. Aesthetically pleasing, curved face, rounded corner design. Test switch provided.


## MOUNTING

EZ-snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.

Project:	Date
Type:	
Model:	

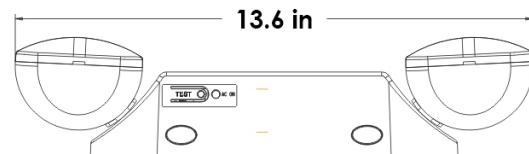

## Example: LE-BPL-2S-W-N

Series	LED Light	Finish	Battery	Listings
<b>LE-BPL</b> Emergency 2 Light Bug Eyes Square	<b>2S</b> 2LT Square	<b>W</b> White	<b>N</b> Nickel-cadmium batteries 3.6V	

Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.