

Project:	Date
Type:	
Model:	

Features:

HOUSING MATERIALS	Coated aluminum, anodized powder coating. T=60-80 um. Adhesion of ISO class, 1.ASTM class 4B
GLASS LENS	Tempered step glass. T=3mm
DIMMABLE	Not dimmable
CABLE GLAND	Nickel coated copper
GASKET	Tooling shaped seal
PCB	Excellent heat conductivity aluminum.
SPIKE	ABS
OPERATING TEMPERATURE	-4°F to 113°F
POWER CABLE	H05RN-F 2X1.0mm ² L=2.0m (low voltage)
FIXTURE IP/ IK Rating	IP66 Rated / IK02



RGC

OPTICS



RGC



15°



20°



30°



45°

FINISH OPTIONS



Aluminum
Anodized



Silver
RAL9006



Black
RAL9005



Dark Bronze
RAL8019

Example: RGC-1L40K-D15-X-SV



Series	Lumens (CCT)			Beam Angle				Voltage	Finish
RGC 2.6 Watts	1L20K 1L (2000K) 160 Lumens	1L30K 1L (3000K) 185 Lumens	1L40K 1L (4000K) 192 Lumens	D15 15°	D20 20°	D30 30°	D45 45°	X X = 24 Volts Requires remote 24V transformer.	BK Black BZ Bronze SV Silver ALU Aluminum


Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Table with 2 columns: Series, RGC. Rows include Power (2.6W), Lumens (160 (20K) 185 (30K) 192 (40K)), IP Rating (IP66), Operating Temp. (-4°F to 104°F), and Input (24V).

DIMENSIONS

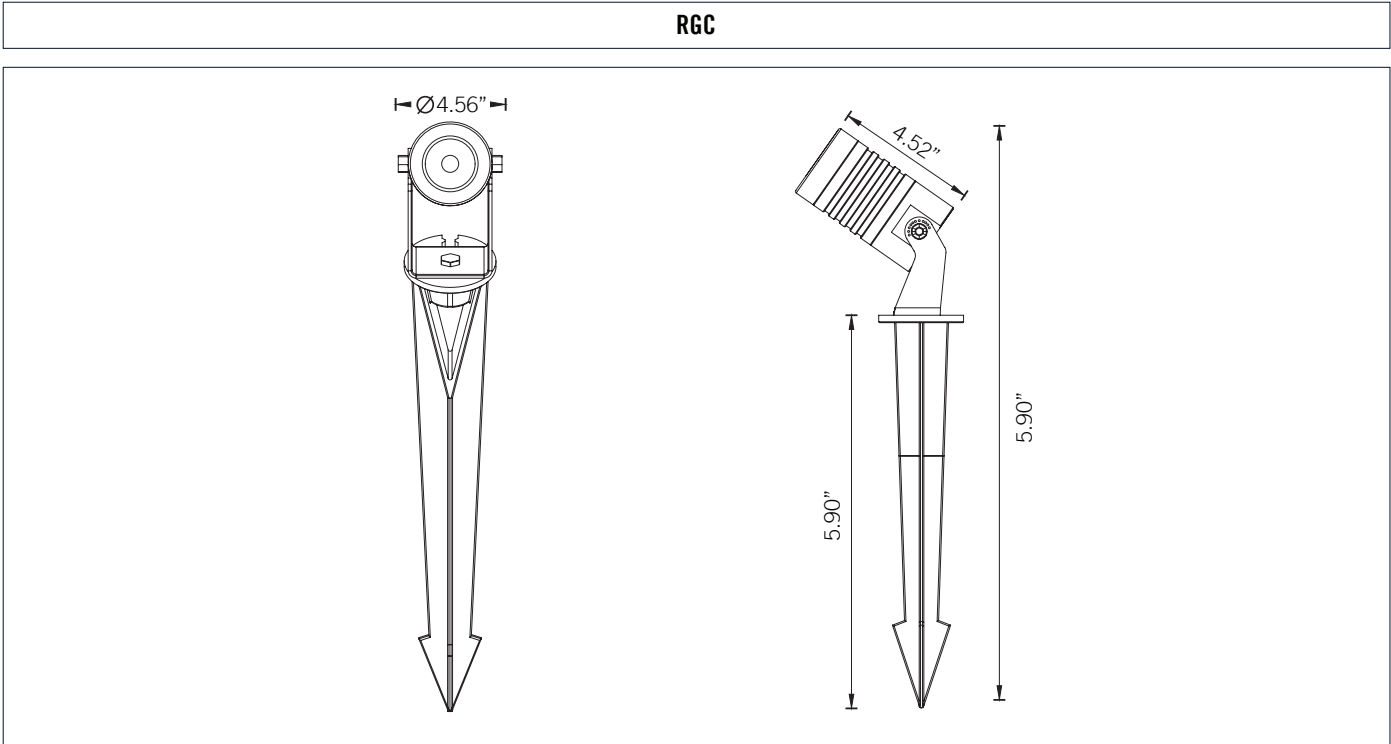

PHOTOMETRIC CURVES

