
DLH 2TD 23 Z ICQA

2 INCH LED REMODEL & NEW CONSTRUCTION HOUSINGS IC RATED




DLH-2TD-N-23-Z-ICQA
2" IC Air-Tight Dedicated New Construction Housing



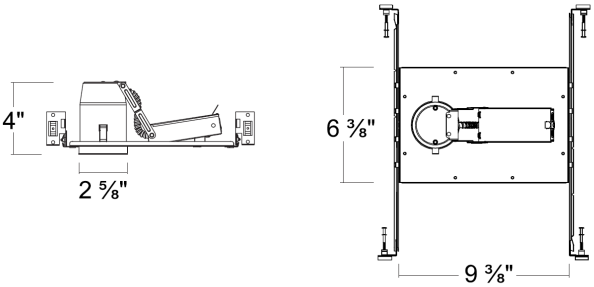

DLH-2TD-R-23-Z-ICQA **
2" IC Air-Tight Dedicated Remodel Housing

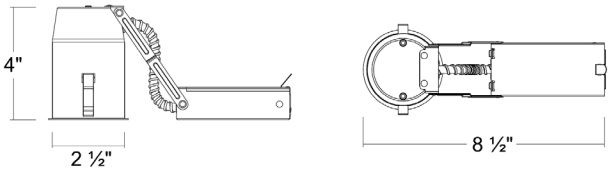

** Contact vendor for lead time.

SPECIFICATION

FRAME CONSTRUCTION
- Galvanized steel construction
- Housing with J-Box can be from separate the frame, easily to connect wires.

FRAME BAR HANGER
- Pre-installed Real nail easily installs in regular lu ber, engineered lumber
- Bar Hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

REMODEL BRACKETS
- Two remodel Brackets secure housing and accomodates max 1 inch ceiling materials

JUNCTION BOX
- Listed for through branch circuit wiring
- Contains two 3/8" knockouts


LISTINGS
- ULus Listed for Damp Location
- ULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction.

COMPATIBLE TRIMS



DL-2HD-RS-CCTS

CONNECTOR



Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.