

Project:	Date
Type:	
Model:	

DESCRIPTION

The LMS2 security light utilizes a PIR sensor to detect infrared signals and activate the LED luminaire. When someone enters the detection zone, the luminaire automatically turns on. Additionally, it features a built-in photosensor that allows it to switch on or off based on the ambient light levels. The light is CCT selectable, offering three color temperatures to suit your preference.

FEATURES

- Aluminum housing, finished with powder coating.
- LED chip: standard 80 CRI.
- 120VAC
- 3 CCT Selectable allows for further customization based on your requirements.
- Provides 1,800 Lumens.
- IK08 & IP65 Rated.
- Built in Photocell with on/off switch.
- Operating Temperature: -5°F to 122°F
- Average life 50,000 hrs.



ORDER INFORMATION

EXAMPLE: LSM2-2H-20W-Y-CCTS-WH-MS



Series	Wattage	Voltage	CCTS	Finish	Motion Sensor
LSM2-2H 2 Head Security Wall Light	20W 20 Watts	Y 120-277V	CCTS Selectable Color Temperature (3000K / 4000K / 5000K)	BK Black WH White	MS PIR Motion Sensor

Enter configuration: _____

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

LSM2 Security Light


LED 3 Selectable CCT



PERFORMANCE

Model	Wattage	Lumens (110° Beam)	CCT Selectable	CRI	Power Factor	Voltage & Frequency	Detection Range & Distance
LSM2	20W	1,800 LM	3000K	>80	>0.9	120V 50/60Hz	150° / 270° optional Max. 10m, adjustable
			4000K				
			5500K				

DIMENSIONS

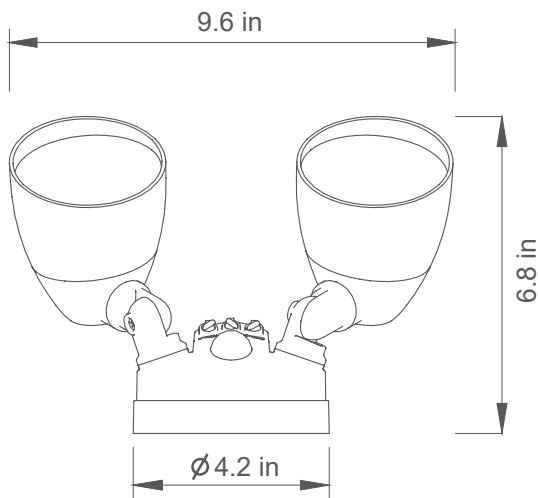

DIRECTIONAL LIGHTING

