

Project:	
Types:	
Model#	

MWPK-30W LED Wall Pack

PRODUCT DESCRIPTION


The Luminoso MWPK 30W series combines traditional styling with the latest LED technology. The high pressure die cast housing along with anti-static powder painting makes this product ideal for exterior applications. The MWPK's highly efficient cooling system allows lower running temperatures translating into a maximized product life. The wall pack has a built in UL class driver and is also rated for damp and wet locations. Ideal for entry ways, area perimeters, stairwells and hallways this product offers the added security and cost effectiveness to meet any demand.

PERFORMANCE SUMMARY


Efficacy: 127 Lm/W
Power consumption: 30 Watts
Delivered Light Output: 3,200 - 3,800 Lm
CRI : Ra>70
CCT : 4000K - 5000K
Input Voltage: 120 - 277 VAC
Input current: 0.33 - 0.14 Amps (120-277V)
THD: <20% (at 120V)
Power factor: > 0.9 (120V)
IP Rating: IP65
Standard Warranty: 5 Years
Non-dimmable
Standard Lifetime: Designed to L70 minimum 50,000 hours
Qualifications: UL Listed



DIMENSIONS

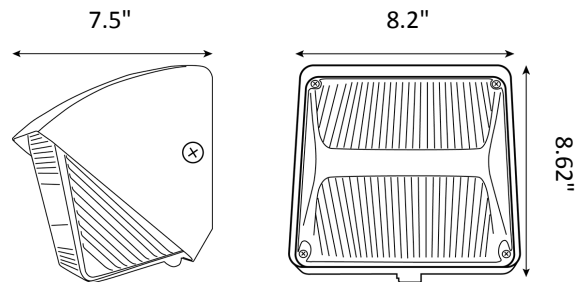

Luminous Intensity Distribution Curve

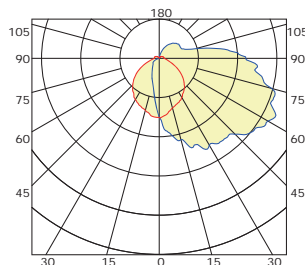

Average Diffuse Angle(50%): 103.0°

ORDER INFORMATION

EXAMPLE: MWPK-14-30W-50K-3M-Y-BZ



Series	Mount	Wattage	CCT	Optics	Voltage	Finish	Options
MWPK	14 = Direct Mount	30W	40K = 4000K 50K = 5000K	3M = 180° (Half Round)	Y = 120-277V	BZ = Bronze	PC-120V PC-277V

Enter configuration:

** Special Order / contact vendor

