


# LED EMERGENCY LIGHT

## 2LT WEDGE FLAT LIGHT

### FEATURES:

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall mounting
- Input Voltage: 120/277VAC 60Hz
- Super bright SMD LED 2x2W
- Nickel Cadmium Battery
- Test button and charge indicator light
- Backup time: ≥90minutes
- Conversion time: <0.2second
- IP Class: IP20
- Insulation: II, Range: 8m<sup>2</sup>
- Operating Temperature: 14°F to 104°F
- Overcharge & Over-discharge protection
- Dimension: 11.8 x 5.1 x 2.7 IN

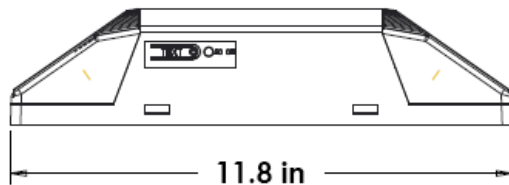

### HOUSING

Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white finish. Aesthetically pleasing, curved face, rounded corner design. Test switch provided.



### MOUNTING

EZ-snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.

### WARRANTY

5 year limited warranty on all electronics and housing. Battery pro-rated for five years.

**EXAMPLE:** LE-WPL-2F-W-N

Series	LED Light	Finish	Battery	Listings
LE-WPL	2F 2x2W LED	W White	N Nickel-cadmium batteries	 

Enter configuration: \_\_\_\_\_

