

PRODUCT DESCRIPTION

Luminoso 4 inch Rotatable LED Residential Downlight provides advanced dimming parameters with capabilities reaching to as low as 5% and works with most widely available traditional dimmers. It is designed to easily install into existing IC or non-IC Six-inch and some Five-inch housings. The RDL is produced with an adjustable gimbal which allows for angling up to 30°. This allows the product to be ideal for situations where a directional light source is needed.

PERFORMANCE SUMMARY

| |
|--|
| Efficacy: 69.56LPW |
| Delivered Light Output: 696.98Lumens |
| Rated Power: 10Watts |
| CRI:Ra>80 |
| ES CCT Options:2700K 3000K 4000K 5000K |
| Input Voltage: 120 VAC |
| Input current:0.1A |
| THD:<17.44% |
| PF:>0.9596 |
| Standard Warranty: 5 Years |
| Standard Lifetime: Designed minimum 35,000 hours |
| Mounting: Recessed |

CERTIFICATE

| |
|--------------------|
| UL listed |
| Energy Star Listed |
| T24 Listed |

Suitable for damp locations.




4 INCH




Accessories



Dimension

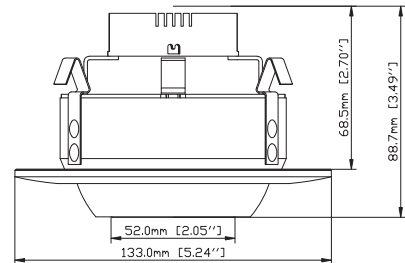

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

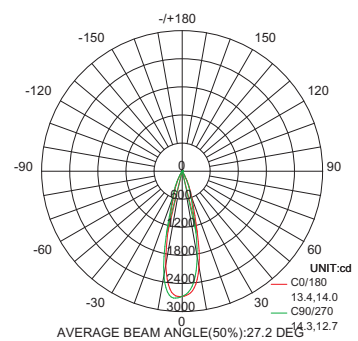

Order Information

RDL4-04-10W-27K-S-Z

| Category | Base | Wattage | CCT(X) | Beam Angle | Voltage |
|----------|----------|---------|--|------------------|----------|
| RDL4 | 04 = E26 | 10W=10W | 27K=2700K 30K=3000K 40K=4000K 50K=5000K | S = 38 O = 30 | Z = 120V |