

## DL-SP4

4 IN SQUARE PANEL / 120-277V

Project:	Date
Type:	
Model:	

### DESCRIPTION

The 4" LED Square Panel Light, DL SP4, comprises a single trim featuring a sturdy die-cast body along with a J-Box equipped with a driver. Our low profile design make it easy for mounting in confined ceilings or narrow spaces. Rated for IC and damp locations, this easy-to-install fixture does not require a separate housing as it can be mounted directly into the ceiling.

### PRODUCT SPECIFICATIONS

- White painted Die-cast body is appropriate for heat dissipation.
- 2 Spring clips per-installed on unit for easy installation.
- One light J-Box.

### LED LIGHT ENGINE


- Dimming down to 10% with TRIAC dimmer (at 120V only).\*
- CCT 3000K, 4000K, 5000K available.
- CRI 90
- Long life LED chips guaranteed up to 50,000hours.

### LISTINGS

- UL Listed
- Damp locations
- RoHS compliances
- Tested in accordance with IESNA LM79 & LM80



### DIMENSIONS

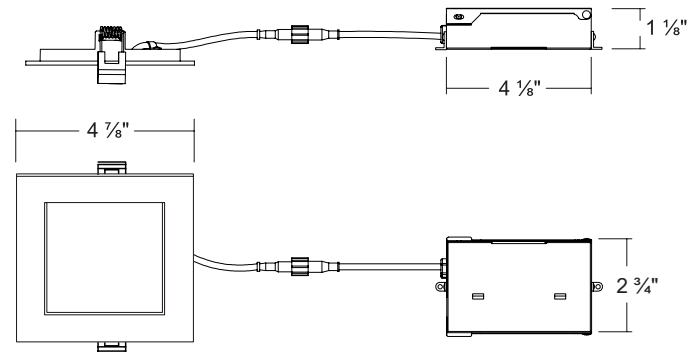

### ORDER INFORMATION

EXAMPLE: DL-SP4-10-30K-Y-W



Series	Wattage	CCT	Voltage	Finish
<b>DL-SP4</b> 4 inch Square Panel	<b>10</b> 10 Watts	<b>30K</b> 3000K <b>40K</b> 4000K <b>50K</b> 5000K	<b>Y</b> Y = 120-277V* (Dims at 120V only) <b>Z</b> Z = 120V**	<b>W</b> White

Enter configuration:

\*\* Special Order

**PERFORMANCE DATA**

Watts	CRI	CCT	Lumens	Voltage	Frequency
10W	90	3000K 4000K 5000K	530 Lm 540 Lm 660 Lm	Y Y = 120-277V* (Dims at 120V only)  Z Z = 120V**	50/60Hz

**PHOTOMETRIC**

