
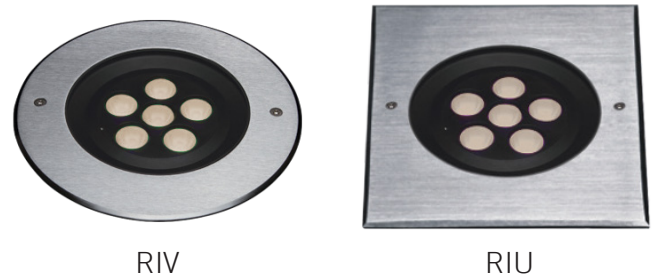


Project:	Date
Type:	
Model:	

Features:

HOUSING MATERIALS	Die-casting dark gray powder coated aluminum T=60~80 um./Adhesion of ISO class, 1.ATM class 4B
FRONT COVER	Chromeplated stainless steel SUS 316 [#]
GLASS LENS	Tempered step glass. T=8mm
DIMMABLE	No
CONCRETE POUR KIT / SLEEVE	ABS
WATER-TIGHT CABLE GLAND	IP68
REFLECTOR	Optical reflector 9°/ 15°/ 20°/ 30°/ 45°
LED	OSRAM
OPERATING TEMPERATURE	-4°F to 104°F
POWER CABLE	H05RN-F 2X1.0mm ² L=0.5m (low voltage)
FIXTURE IP/ IK Rating	IP67 Rated / IK07


OPTICS

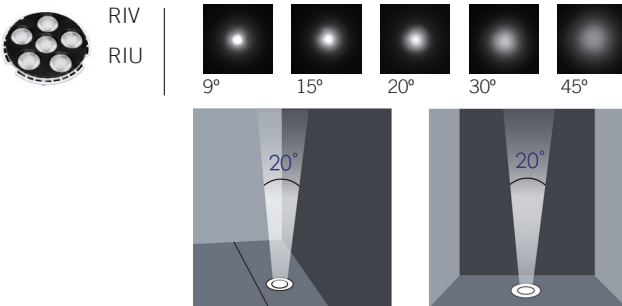

OPTIONAL LOUVER



GLASS PRESSURE CAPACITY



Example: RIV-7L30K-U45-X-SS



Series	Lumens (CCT)			Beam Angle					Accessory	Voltage	Finish
RIV Round Inground 6x2 Watts (12W)	7L30K 7L (3000K) 783 Lumens	9L40K 9L (4000K) 900 Lumens	9L50K 9L (5000K) 956 Lumens	U9 9°	U15 15°	U20 20°	U30 30°	U45 45°	Leave Blank Blank = None	X 24 Volts	SS Stainless Steel 316L
RIU Square Inground 6x2 Watts (12W)	Lumens based off 20° Beam angle								LH013 Hexcell Louver Accessory	Requires remote 24V transformer. This fixture is not dimmable*	


Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RIV / RIU
Power	2x6W (12watts)
Lumens	783 (30K) 900 (40K) 956 (50K)
IP Rating	IP67
Operating Temp.	-4°F to 104°F
Input	24V

DIMENSIONS

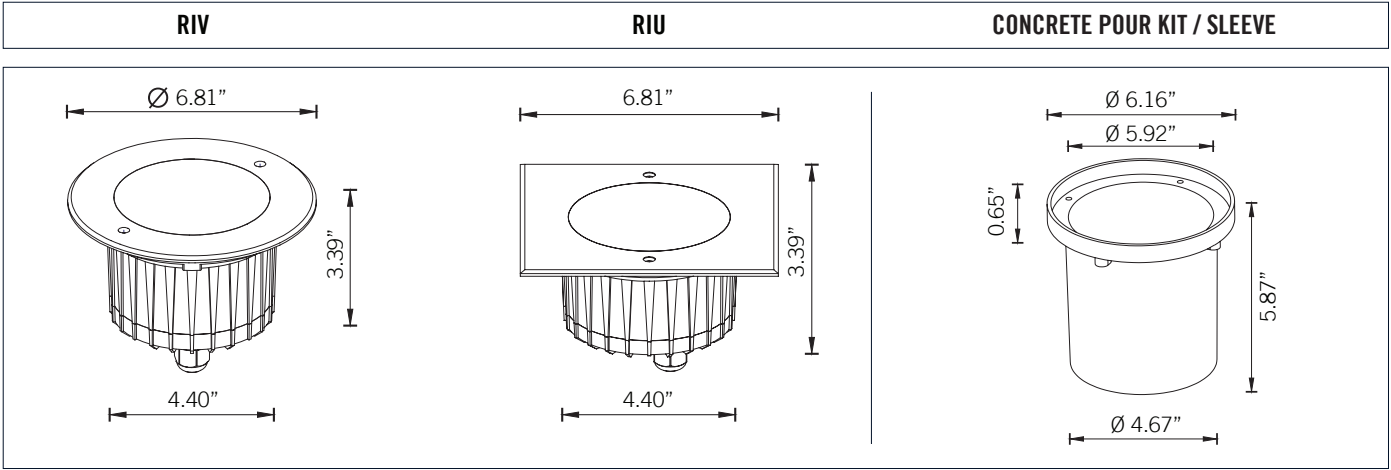

PHOTOMETRIC CURVES

