

Project:	Date
Type:	
Model:	

Features:


HOUSING MATERIALS	Die-casting dark grey powder coated aluminum. T=60-80 um. Adhesion of ISO class, 1.ASTM class 4B
FRONT COVER	Hard Chromeplated Stainless steel 316#
LED	SMD3030
DIMMABLE	No*
Back box / J-Box	ABS
WATER-TIGHT CABLE GLAND	IP67
OPERATING TEMPERATURE	-4°F to 113°F
POWER CABLE	H05RN-F 2X1.0mm ² L=0.5m (24 Volts)
FIXTURE IP/ IK Rating	IP65 Rated / IK09



RSD



MOUNTING SLEEVE

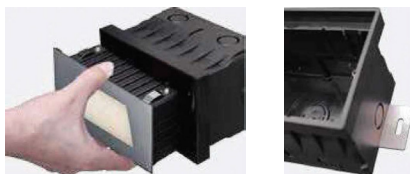

Example: RSD-0L40K-X-SS



Series	Lumens (CCT)	Voltage	Finish
RSD 3.5 Watts	0L40K 0L (4000K) 90 Lumens	X X = 24 Volts Requires remote 24V transformer. This fixture is not dimmable*	SS Stainless Steel

Enter configuration:


** Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RSD
Power	3.5W (18x0.2W)
Lumens	90lm (4000K)
IP Rating	IP65
Operating Temp.	-4°F to 104°F
Input	24V

DIMENSIONS

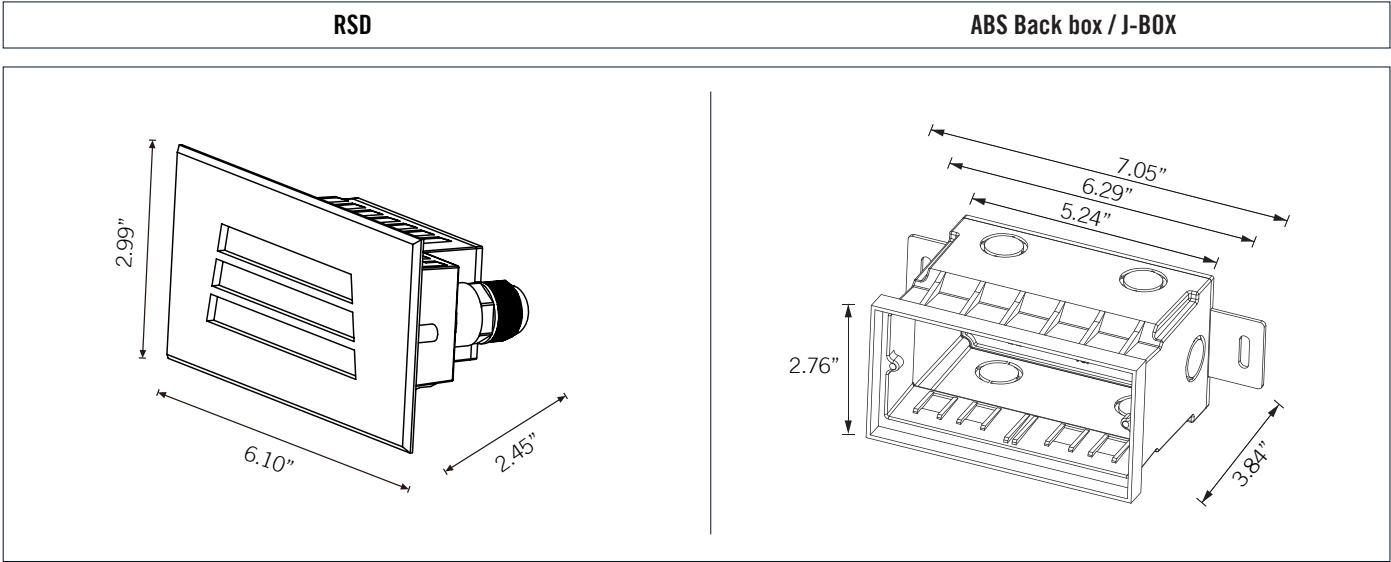

PHOTOMETRIC CURVES

