

DESCRIPTION

The MWR Select Series combines the look of a traditional bollard with industry defining selectable features. This energy saving HID alternative enables you to select both wattage and correlated color temperature all while delivering bright, uniform light. heavy-cast aluminum housing designed with modern aesthetics. The architectural luminaire provides brilliant illumination to walkways and other outdoor spaces, improving the visibility, safety, and overall look of any outdoor area.

FEATURES

- Wattage Selectable: 20W, 30W
- CCT Selectable: 3000K / 4000K / 5000K
- Heavy cast aluminum housing / IP65
- SMD3030
- IP66 UL listed Driver
- Beam angle 360°
- CRI \geq 70
- Lifespan 50,000 Hours
- 120-277V
- Operating Temperature: -31°F to 122°F

Project:	Date
Type:	
Model:	



ORDER INFORMATION

EXAMPLE: MWR-H-WS-CS-5M-Y-BK + MWR-B-36IN-BK



Series	Luminaire	Wattage	CCT	Beam Angle	Voltage	Finish	Base	Size	Finish
MWR Round Bollard	H Luminaire	WS Wattage Selectable (20W / 30W)	CS Color Temperature Selectable (3000K / 4000K / 5000K)	5M Type V	Y Y = 120-277 Volts	BK Black BZ Bronze SV Silver	MWR-B Round Base	18 18in 24 24in 36 36in 42 42in	BK Black BZ Bronze SV Silver
							+		

Enter configuration:


* Custom base lengths available upon request (upcharge applies).

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Item	Power	20W	30W
Lumens	2000lm	3000lm	
Efficiency	100lm/w	100lm/w	
IK-Rating		IK10	
CCT Selectable		3000K / 4000K / 5000K	
CRI		>70	
IP-Rating		IP65	
General Performance			
Input Voltage		120-277V	
Dimming		0-10V	
Power Factor		>.90	
Operating Temp		-31°F to 122°F	
Electrical			
Housing		Die-cast aluminum body, Polycarbonate reflector	

DIMENSIONS

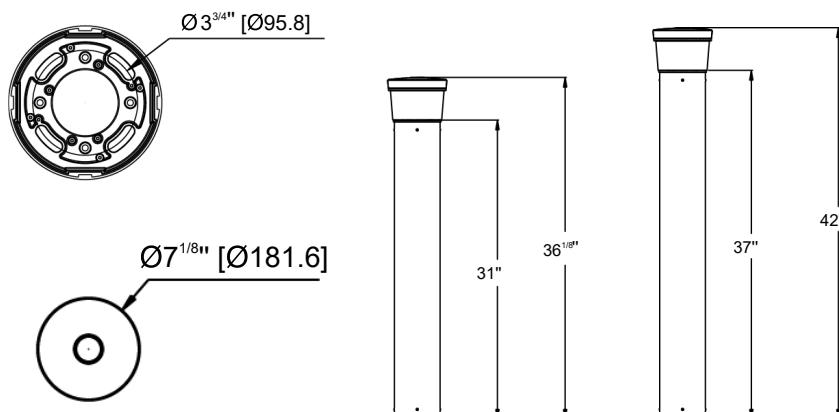

PHOTOMETRIC DATA

