

Project:	Date
Type:	
Model:	

Features:

HOUSING MATERIALS | Coated aluminum, anodized powder coating.
T=60-80 um. Adhesion of ISO class, 1.ASTM class 4B

GLASS LENS | Tempered step glass. T=4mm

DIMMABLE | Not dimmable

CABLE GLAND | Nickel coated copper

GASKET | Tooling shaped seal

PCB | Excellent heat conductivity aluminum.

OPERATING TEMPERATURE | -4°F to 113°F

POWER CABLE | H05RN-F 2X1.0mm² L=2.0m (low voltage)

FIXTURE IP/ IK Rating | IP66 Rated / IK07



RGJ

OPTICS



RGJ



15°



25°



40°



60°

FINISH OPTIONS



Silver Gray
RAL9022



Sanded White
RAL9003



Black
RAL9005

Example: RGJ-12L50K-D45-X-BK



Series	Lumens (CCT)			Beam Angle				Voltage	Finish
RGJ 11.5 Watts	10L30K 10L (3000K) 1,080 Lumens	11L40K 11L (4000K) 1,154 Lumens	12L50K 12L (5000K) 1,200 Lumens	D15 15°	D25 25°	D40 40°	D60 60°	X X = 24 Volts Requires remote 24V transformer.	BK Black SW Sanded White SG Silver Gray


Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RGJ
Power	11.5W
Lumens	1,080 (30K) 1,154 (40K) 1,200 (50K)
IP Rating	IP66
Operating Temp.	-4°F to 104°F
Input	24V

DIMENSIONS

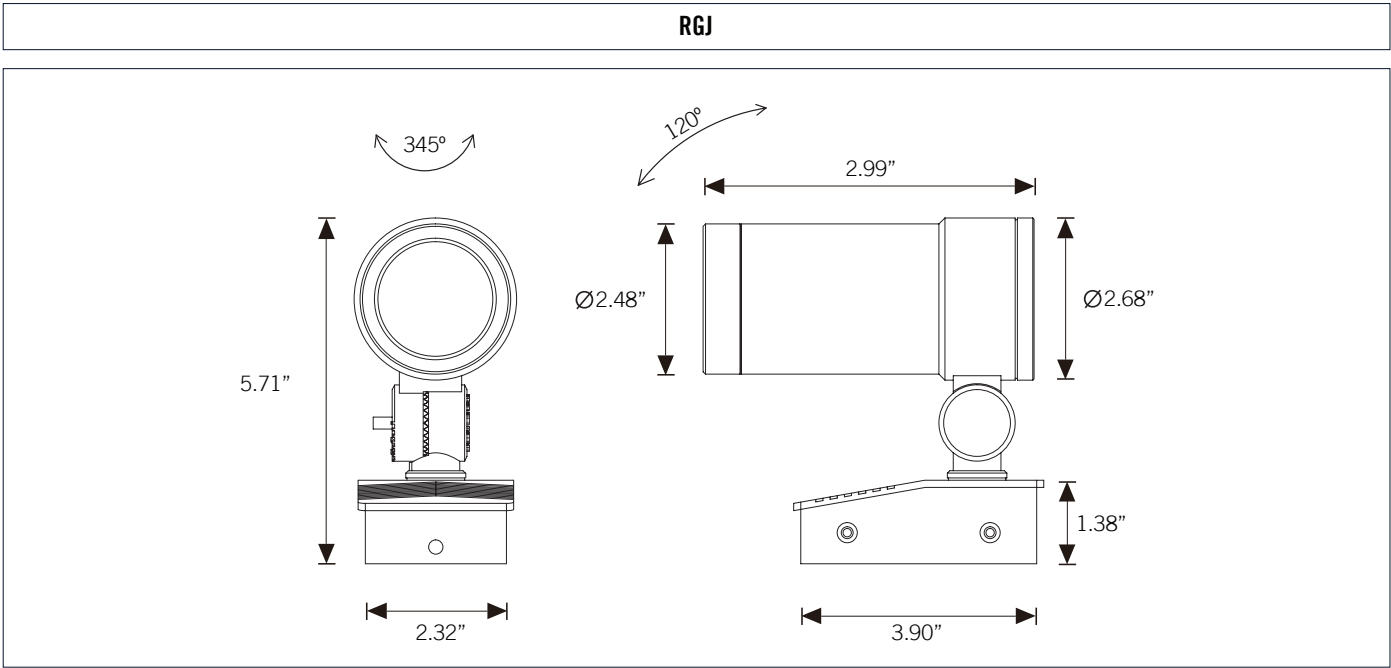

PHOTOMETRIC CURVES

