

Project: _____

Type: _____

Model: _____

Features:

- HOUSING MATERIALS** | Extruded aluminum alloy, Die-casting, Powder coating, T=60~80 um./Adhesion of ISO class, 1.ASTM class 4B
- FINISH** | Black / White / Graphite / Silver / Bronze
- REFLECTOR** | Optical reflector. efficiency >85%
- LED** | NICHIA
- OPERATING TEMPERATURE** | -4°F to 104°F
- POWER CABLE** | H05RN-F 3X1.0mm² L=0.3m (High voltage)
- IP / IK Rating** | IP65 Rated / IK05



RWN


OPTICS



RWN



25°

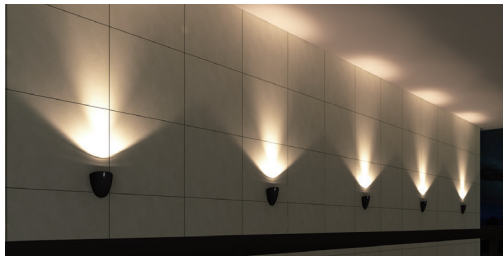

FINISH OPTIONS



Black
RAL9005



White
RAL9003



Graphite
RAL7037



Silver
RAL9006



Bronze
RAL8019

Example: RWN-8L40K-D25-Z-BK



Series	Lumens (CCT)			Down Beam	Voltage	Finish
RWN 14 Watts	7L30K 7L (3000K) 790 Lumens	8L40K 8L (4000K) 834 Lumens	9L50K 9L (5000K) 900 Lumens	U25 25° May be mounted facing down	Z Z = 120 Volts	BK Black WH White GR Graphite SV Silver BZ Bronze

Enter configuration: _____


** Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RWN
Power	14W
Lumens	790 (30K) 834 (40K) 900 (50K)
IK Testing	IK05
Operating Temp.	-4°F to 104°F
Input	120V

DIMENSIONS

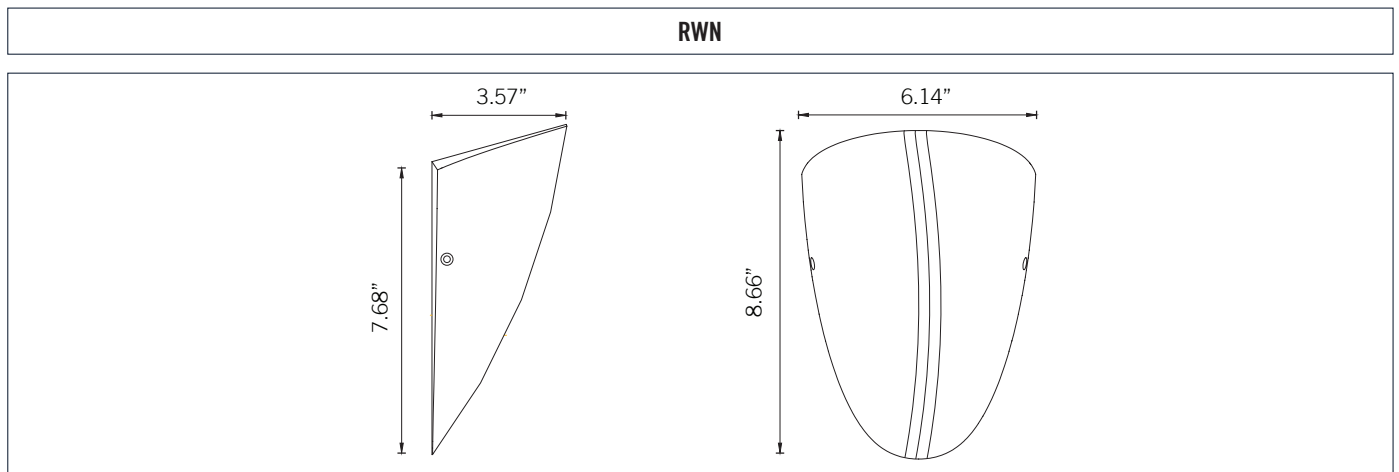

PHOTOMETRIC CURVES

