

Project:	Date
Type:	
Model:	

## SHB-WS240-CCTS High Bay

Wattage & CCT Selectable

### PRODUCT DESCRIPTION


The SHB high bay light is truly remarkable, thanks to its built-in Wattage and Color Temperature Selectable (CCT) switch. This versatility allows it to adapt to a wide range of environments. Selectable wattage options are 150W, 200W, and 240W, as well as select your preferred color temperature from 3000K, 4000K, and 5000K. This gives businesses and establishments the flexibility to precisely tailor the lighting to their specific needs.

### FEATURES

- CCT & Wattage Selectable
- Efficacy up to 160lm/W, designed to replace 450W and 750W HID.
- Die-cast aluminum housing, and polycarbonate diffuser.
- 110 degree lens guarantees light intensity and light uniformity.
- 90° optic reflector.
- Eye bolt included.
- Optional motion sensor can be offered for maximizing energy savings, and security.
- IP65 Rated
- IK08 Rated
- Operating temperature is -20°F to 122°F.
- Power Factor: >0.9







Motion Sensor Option Available



### ORDER INFORMATION

EXAMPLE: SHB-WS240-Y-CCTS-AL-MS



Series	Wattage Selectable	Voltage	CCT Selectable	Reflector	Mounting	Motion Sensor
<b>SHB</b> High Bay	<b>WS</b> (240W / 200W / 150W)	<b>Y</b> Y = 120-277V	<b>CCTS</b> Selectable Color Temperature (3000K / 4000K / 5000K)	<b>Blank</b> No Reflector	<b>Blank</b> Eye bolt Mount	<b>Blank</b> No Sensor
				<b>PC</b> Polycarbonate Reflector 90° 	<b>HK</b> Hook  <b>TR</b> Trunnion 	<b>MS</b> PIR Motion Sensor IP65 rated / 12Vdc 


Enter configuration: \_\_\_\_\_

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

**PERFORMANCE DATA**

Model	SHB-WS240
System Power	240W / 200W / 150W
Voltage	120-277VAC
Frequency	50/60Hz
Lumen (Max, 5000K)	(38,400lm 32,000lm 24,000lm)
Efficacy	160 lm/W
Diffuser	Polycarbonate
Body materials	Cast Aluminum
Finish	Black
LED type	2835
CCT Selectable	3000K / 4000K / 5000K
CRI	70
PF	>0.9
Beam angel	120°
IP	IP65
IK	IK08
Installation	Eye Bolt / Hook / Trunnion
Operating Temp.	-20°F to 122°F
Certificate	UL
Net Weight (lbs)	5.51

**DIMENSIONS**

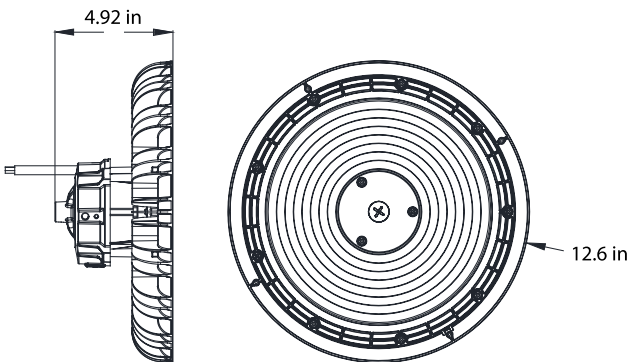

**ACCESSORIES**



90° PC Reflector  
(Sold separately)



Hook  
304 stainless steel  
(Sold separately)



50° adjustable Trunnion  
(Sold separately)