

Project		Date
Type		
Model		

TLB Series LED Linear High Bay



Features

- High luminous efficacy 130lm/w.
- UL listed; With LM79 & LM80
- 2ft: 80/110W/165W
- High quality non-isolated driver 0-10V dimming, Flicker free
- PF> 0.9, driver efficacy >87%; THD<20%
- Suitable for dry / damp location.
- Designed for warehouses, gymnasiums, and industrial spaces.
- CCT: 4000K & 5000K.
- Five years warranty.



Dimensions

Size	80/110W	165W
A:	9.7in	12.6in
B:	23.8in	23.8in
C:	0.79in	0.79in
D:	1.97in	1.97in

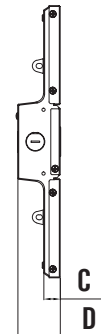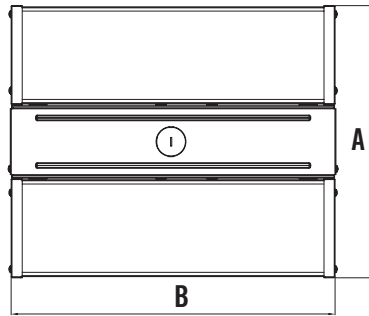

ORDER INFORMATION

EXAMPLE: TLB-165W-Y-100D-50K



Series	Wattage	Voltage	Beam	CCT
TLB Linear High Bay	80W 110W 165W	Y 120-277V (80W NOT Available) HV 347V (80W & 110W ONLY)	100D 100°	40K 4000K 50K 5000K

Enter configuration: _____

Note:
1. 347V ONLY available for 80W & 110W.
2. 165W NOT available in 347V.

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.


PERFORMANCE DATA

WATTS	VOLTAGE	CRI	4000K		5000K	
			LUMENS	EFFICACY	LUMENS	EFFICACY
80W	347VAC	80	10,200	128lm/W	10,400	130lm/W
110W	120-277VAC / 347VAC	80	14,000	127lm/W	14,300	130lm/W
165W	120-277	80	21,200	128lm/W	21,450	130lm/W

Note:
 1. 347V ONLY available for 80W & 110W.
 2. 165W NOT available in 347V.

PHOTOMETRIC

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

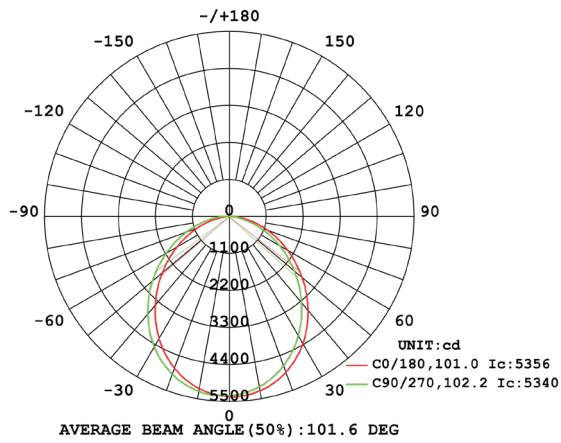

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

