


Project: \_\_\_\_\_

Type: \_\_\_\_\_


Model: \_\_\_\_\_

**Features:**


<b>HOUSING MATERIALS</b>	Die-casting dark grey powder coated aluminum. T=20-25 um. Adhesion of ISO class, 1.ASTM class 4B
<b>FRONT COVER</b>	Hard chrome-plated stainless steel SUS 316#
<b>LED</b>	SMD3030
<b>DIMMABLE</b>	Non-dimmable
<b>J-BOX</b>	ABS
<b>WATER-TIGHT CABLE GLAND</b>	IP67
<b>OPERATING TEMPERATURE</b>	-4°F to 113°F
<b>POWER CABLE</b>	H05RN-F 2X1.0mm <sup>2</sup> L=0.5m (24 Volts)
<b>FIXTURE IP/ IK Rating</b>	IP65 Rated / IK10

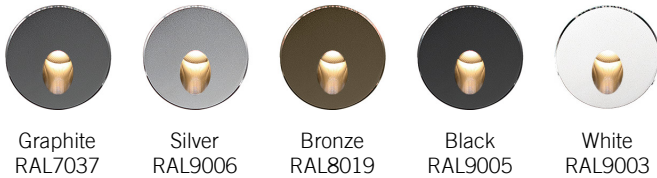**FINISH OPTIONS**


Graphite RAL7037    Silver RAL9006    Bronze RAL8019    Black RAL9005    White RAL9003




RSV-R




RSV-S



Cut-out



Pressure clips snaps into wall



ABS sleeves allows for install to concrete wall.

**Example: RSV-R-0L30K-X-GR**


Series	Trim Shape	Lumens (CCT)			Voltage	Finish
		0L20K	0L30K	0L40K		
RSV 2.4 Watts	<b>R</b> Round	0L (2000K) 30 Lumens	0L (3000K) 36 Lumens	0L (4000K) 45 Lumens	X X = 24 Volts	BK Black WH White GR Graphite SV Silver BZ Bronze
	<b>S</b> Square					
					Requires remote 24V transformer.	

Enter configuration: \_\_\_\_\_


\*\* Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.



**PERFORMANCE DATA**

Series	RSV-R-S
Power	2.4W
Lumens	30 (20K) 36 (30K) 45 (40K)
IP Rating	IP65
Operating Temp.	-4°F to 113°F
Input	24V

**DIMENSIONS**

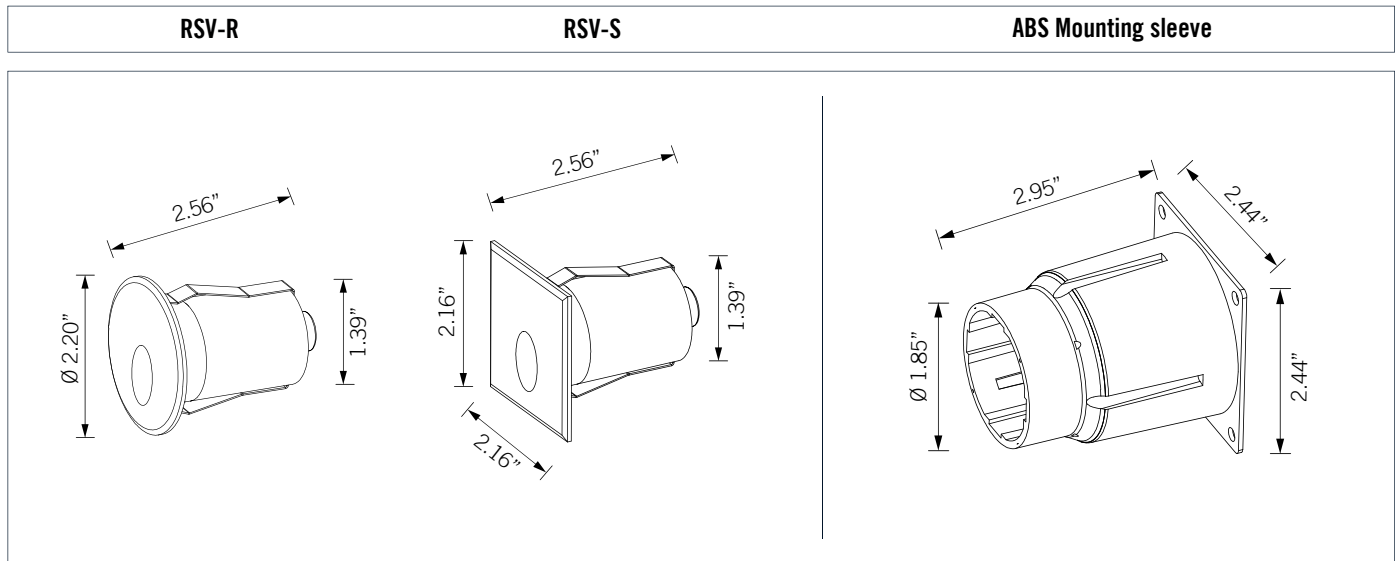

**PHOTOMETRIC CURVES**

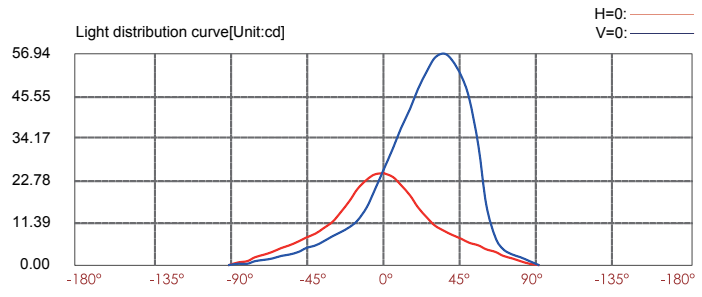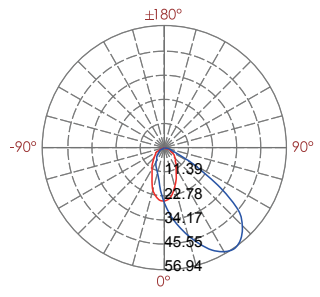

Lux distance cure

Center beam LUX	beam width V	H
2m	6.20 LUX	1.6m 2.00m
4m	1.55 LUX	3.2m 4.10m
6m	0.69 LUX	4.8m 6.10m
8m	0.39 LUX	6.4m 8.10m
10m	0.24 LUX	8.0m 10.1m
12m	0.17 LUX	9.6m 12.2m

Ver.Spread:43.7H oriz.Spread:53.8