

ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Single face utilizes factory installed clear panel.

FEATURES

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall, side and ceiling mounting
- Input Voltage: 120-277VAC 60Hz
- Bright LED 2 watts
- Test button and charge indicator light
- Backup time: ≥90minutes
- Conversion time: <0.2second
- IP Class: IP20
- Insulation: II
- Operation temperature: 14°F - 104°F
- Overcharge & Over-discharge protection
- 50,000 hours LED lifespan
- 3.6V 300mAh Nickel-Cadmium battery, light last more than 90 minutes after power failure.

HOUSING

Injection-molded, engineering-grade, flame retardant. Ultra bright, energy efficient, long life. UV-stabilized ultra-clear acrylic edge-lit panel provides consistent, uniform illumination. This Single faced sign, utilizes factory installed transparent background panel. Test switch provided.


MOUNTING

EZ-snap mounting canopy included for top or end mount.
Adjustable backplate with knockouts for wall mount.

Project:	Date
Type:	
Model:	



Example: LE-XEL-U1-RA-N

Series	Face No.	Letter Color	Battery	Listings
LE-XEL Edge lit Exit sign	U1 Single face	RA RED letters Clear panel	N Nickel-cadmium batteries	
		GA GREEN letters Clear panel		

Enter configuration:

** Special Order/ 6-8 weeks


Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

LE XEL U1

LED Edge Lit Exit Red/Green Single Face Clear Panel



DIMENSIONS

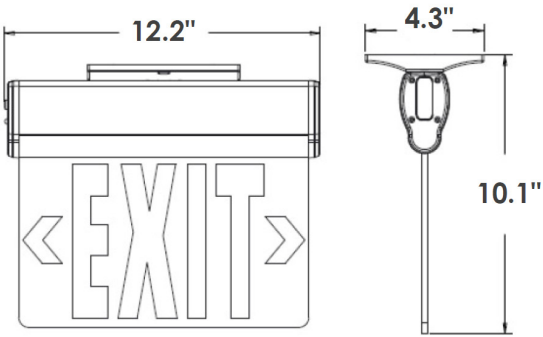

ADJUSTABLE

