

Project:	
Type:	
Model#	


## LFP24 Series 40W 2x4 LED Panel

### PRODUCT DESCRIPTION


The LFP Panels are designed for residential and commercial suspended grid ceilings. Use this 2' x 4' rectangular LED panel light for office lighting, basement lighting, light box and sign back-lighting, gym lighting, school lighting, hospital lighting, and more! Replace existing fluorescent troffer light fixtures, or use it for new construction applications. The LED panel light delivers a smooth, flawless wall of illumination without visible bulbs or hot spots. The 40-watt LED light emits up to 4,000 lumens of natural, cool, or warm white illumination.

### PERFORMANCE SUMMARY


Power: 40 Watts
Delivered Light Output: 4,000 Lumens
Efficacy: 100 Lm/W
CRI: Ra>80
CCT Options: 3500K, 4000K, 5000K
Input Voltage: 120-277 VAC
Power Factor: >0.9
Driver output: DC27-42V 1.A
Standard Warranty: 5 Year Warranty
Standard Lifetime: Designed to L70 minimum 50,000 hours Sign
Working Temperature: -4°F to 104°F
Installation Options: Recessed, Suspended**, Surface Mounted**
0-10V dimming / 10% - 100% Smooth linear dimming
Dimensions: L 47.7" x W 23.7" x H 1.7"



Grid Embedded



Ceiling Mounted



Ceiling Hanging

### ORDER INFORMATION

EXAMPLE: LFP24-40W-Y-50K-18-SO



Series	Wattage	Voltage	CCT	Base	Output	Options
LFP24	40W	Y=120-277V	35K = 3500K 40K = 4000K 50K = 5000K	18 = Lay In	SO = Standard Output HO = High Output**	EB = Emergency Battery Backup


Enter configuration:

\*\* Special Order / contact vendor

Series / Performance

Series No.	LFP24
Power:	40W
Lumens:	4,000
Efficacy:	100 Lm/W
CRI:	80
Input:	120-277V AC

Dimensions

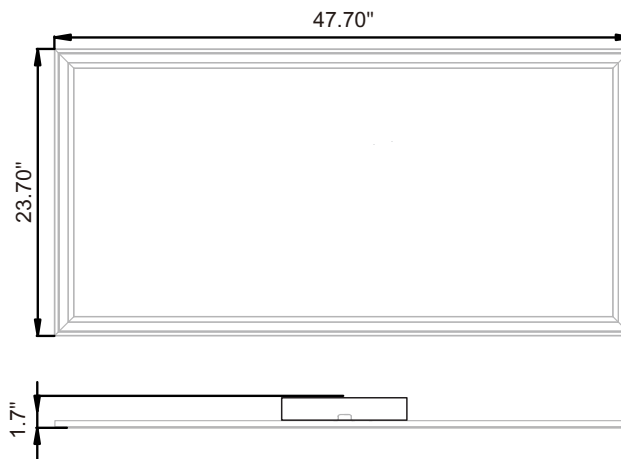

Polar Candela Distribution

Fixture photometry has been conducted in accredited testing laboratory in accordance with IESNA LM-79-08.

100 Lm/W

