
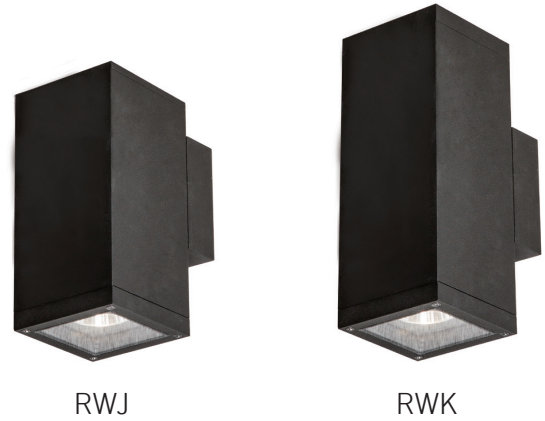


Project:	Date
Type:	
Model:	

Features:

- HOUSING MATERIALS** | Extruded aluminum alloy, Die-casting, Powder coating, T=60~80 um./Adhesion of ISO class, 1.ASTM class 4B
- FINISH** | Black / White / Graphite
- REFLECTOR** | Optical reflector. efficiency >85%
- LED** | NICHIA
- DIMMABLE** | No
- OPERATING TEMPERATURE** | -4°F to 104°F
- POWER CABLE** | H05RN-F 3X1.0mm² L=0.3m (High voltage)
- IP / IK Rating** | IP65 Rated / IK06

OPTICS

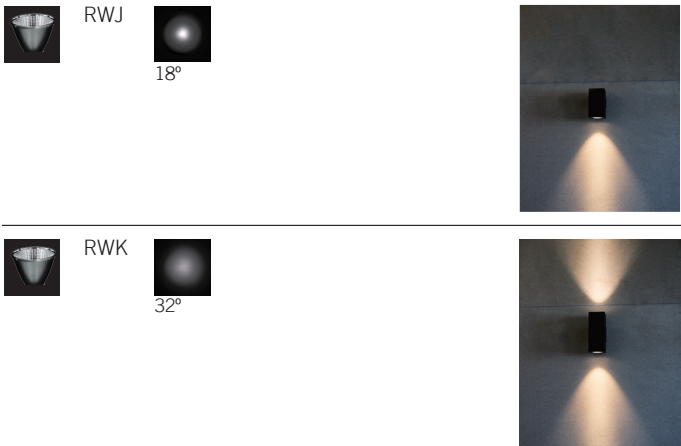

FINISH OPTIONS



Example: RWK-7L40K-D32-U32-Z-SV



Series	Lumens (CCT)	Beam Angle		Voltage	Finish
RWK Up/Down Wall light 2x13 Watts	6L30K 6L (3000K) 680x2 Lumens	D32 32°	U32 32°	Z 120 Volts	BK Black
RWJ Wall light 20 Watts	16L30K 16L (3000K) 1,690 Lumens	D18 18°	N/A		


Enter configuration: _____

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RWJ	RWK
Power	20W	13Wx2
Lumens	1,690 (30K)	680*2 (30K)
IK Testing	IK06	IK06
Operating Temp.	-4°F to 104°F	-4°F to 104°F
Input	120V	120V

DIMENSIONS

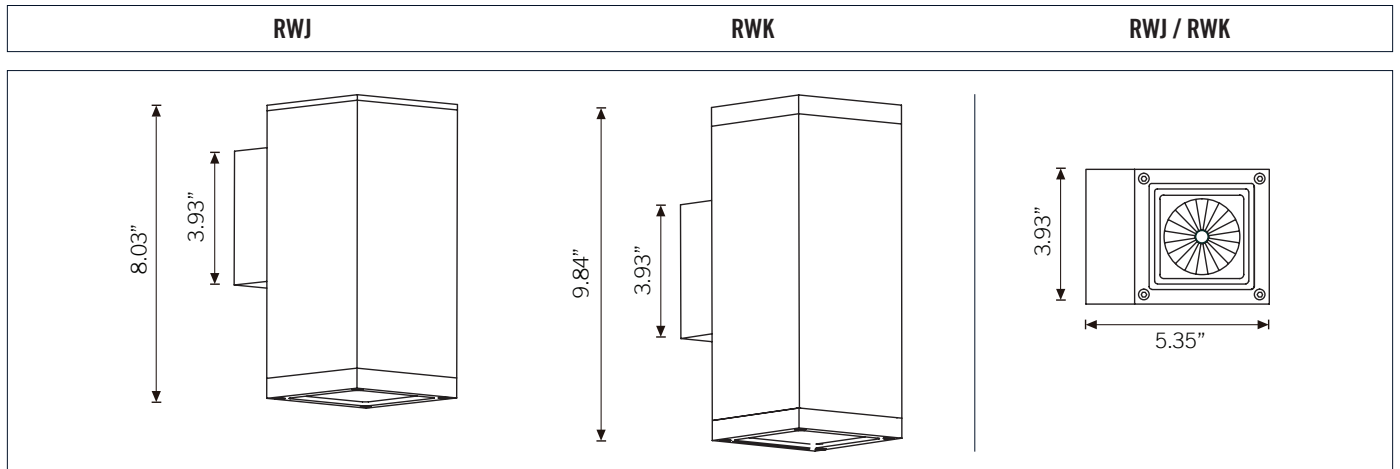

PHOTOMETRIC CURVES

