





- 1. To avoid electric shock, disconnect power at source prior to installation.
- 2. The installation should be performed by qualified electricians or lighting technicians.
- 3. Before conducting any installation, maintenance, or removal, disable all power to the luminaries and wait until the fixture cool down.
- 4. Do not touch the fixture while it is in service.
- 5. Operating temperature is -40°C to 45°C.
- 6. If there is any problem with the fixture, DO turn off power and DO NOT attempt repair unless you are a qualified technician or the customer service member.

## Installation and instructions

Surface mount (default setting)

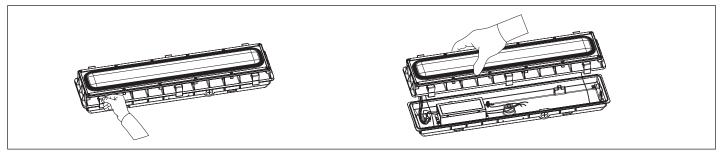


1. Unfasten the latches and separate the led module and the power housing.

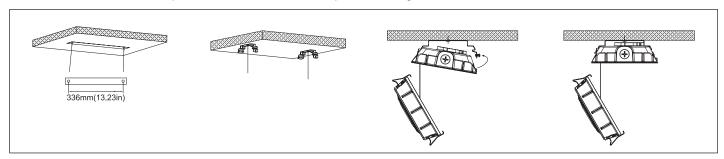


- 2. Use the leveling ruler to settle the screws hole then secure the housing to the ceiling with screws.
- Connect wires (voltage to black, white to common, and green to ground);
  Secure the led module to the housing and fasten six latches, ensuring water does not enter fixture.

## V-Hook Mounting

- 1. Put the mounting bracket on the housing, tighten it with screws.
- 2. Fasten the V hook hang it with the chain.





## **WIRING DIAGRAM**

For 1-10V dimming version, please check wiring diagram below.

Black	Line
White	Neutral
Green/Yellow Green	Ground
Purple	DIM+
Gray	DIM-