


DESCRIPTION

This LED bollard features a durable extruded aluminum housing that can be customized to various heights to meet project requirements. A high-transmittance PC diffuser provides uniform illumination while resisting yellowing and aging over time. Utilizing high-quality LED chips for reliable performance and efficiency, the fixture is finished with a UV-resistant polyester powder coating for long-lasting durability in outdoor environments.

SPECIFICATIONS:

- Die cast aluminum housing.
- Anodized Polypropylene plastic reflector and optics distribution lens.
- Surface anti-aging electrostatic spray processing, resistance to corrosion.
- Available finishes, Black, White, and Silver
- Lumens: 2,500 Lm / 100LPW
- Offered Standard in 3000K, and 4000K
- 120-277V / 50/60Hz
- IK08 rated.

PHOTOMETRIC:

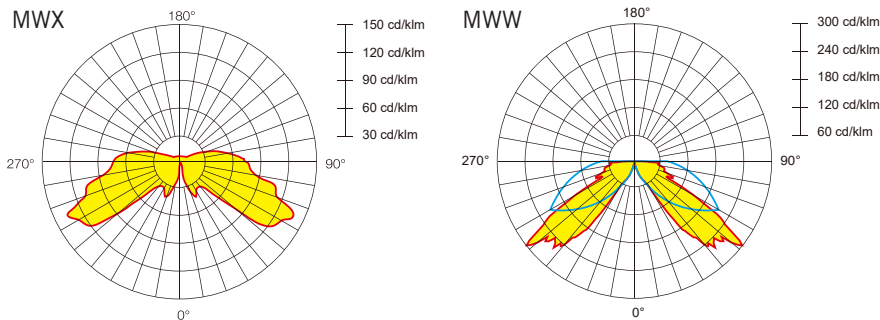

Example: MWX-39-25W-Y-40K-T5-29-SV



Series	Height	Wattage	Voltage	CCT	Beam Type	Mount	Finish
MWW Bollard	31 31.5 inch height	25W 25 Watts	Y Y = 120-277V	30K 3000K	T5 T5M	29 Achor Bolt	BK Silver
	39 39.4 inch height			40K 4000K			WH White
MWX Bollard w/ Louver	CHXX Custom Height*						SV Silver

Enter configuration:


** Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	MWX	MWW
Power	25W	25W
Lumens	2,500	2,500
IP Rating	IP65	IP65
Operating Temp.	-4°F to 113°F	-4°F to 113°F
Inout	120-277V	120-277V

DIMENSIONS

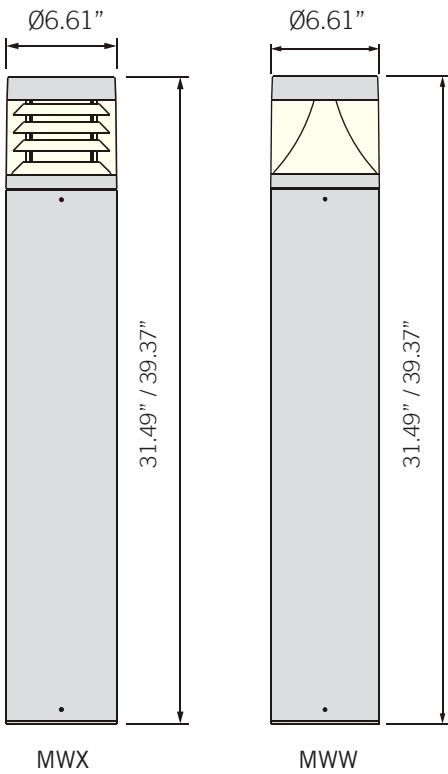

360° DISTRIBUTION

